


MOUNTING THE (JP54-023) HINGE ROTOPAX MOUNT

*Easily mounts to the Heavy-Duty TJ hinges, sold separately

1. Place backer clip inside the upper hinge tube behind the left most hole. (with the tailgate open the inside of the tube can be accessed from the back side.)
2. Insert bolt through the top hole in the carrier and thread it into the backer clip
3. Repeat process with the lower hinge.
4. Tighten both bolts to secure the carrier to the hinges.
5. Attach rotopax mount to carrier (sold separately) - use lower position for one gallon container or use upper position for larger containers

NOTE: • Process is much easier if spare tire is removed before installation
• Maximum spare tire size compatible with the carrier is 33"

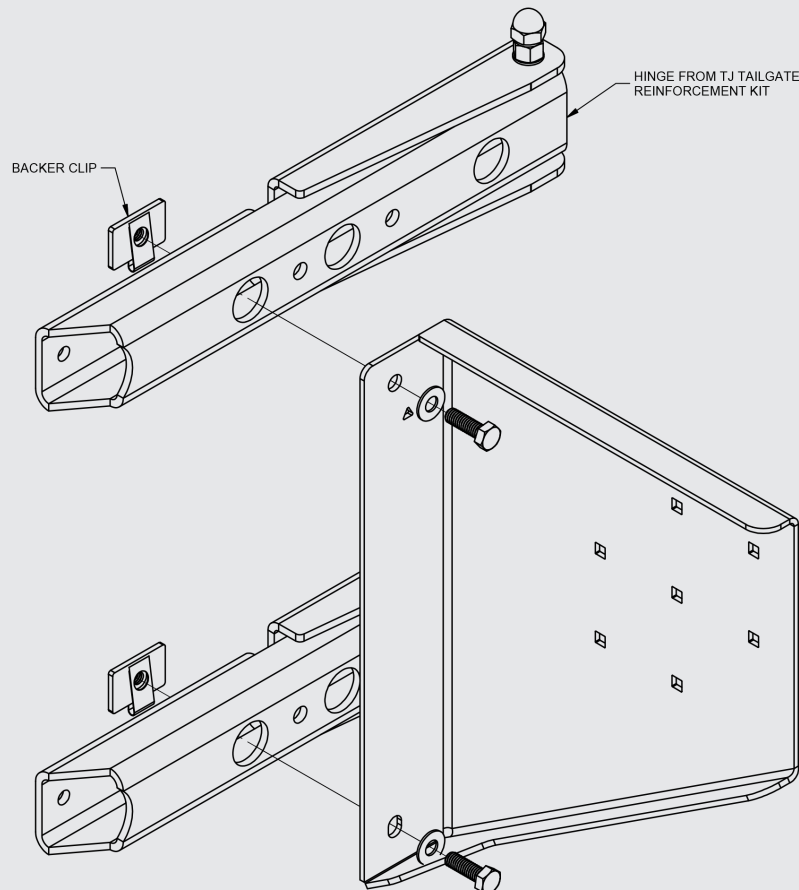



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.