

Mor/ryde Triple Axle RE Pre Installation Qualification

(The MOR/ryde RE system is designed for straight axles w/double eye 1-3/4" wide x 26" long leaf springs)

Customer Name _____ Phone _____

Coach Brand and Model _____ E-mail _____

Model Year _____ Gross Axle Weight Rating (GAWR) 5,200#, 6000# or 7000# ?

Record all measured linear dimensions in inches.

Type of Frame Rail (Check one) Rectangular Tube "I" Beam "C" Frame


Rectangular Tube _____

"I" Beam _____


"C" Channel _____

Other _____


Rectangular Tube




"I" Beam



"C" Frame





Frame Height H = _____ Frame Width W = _____

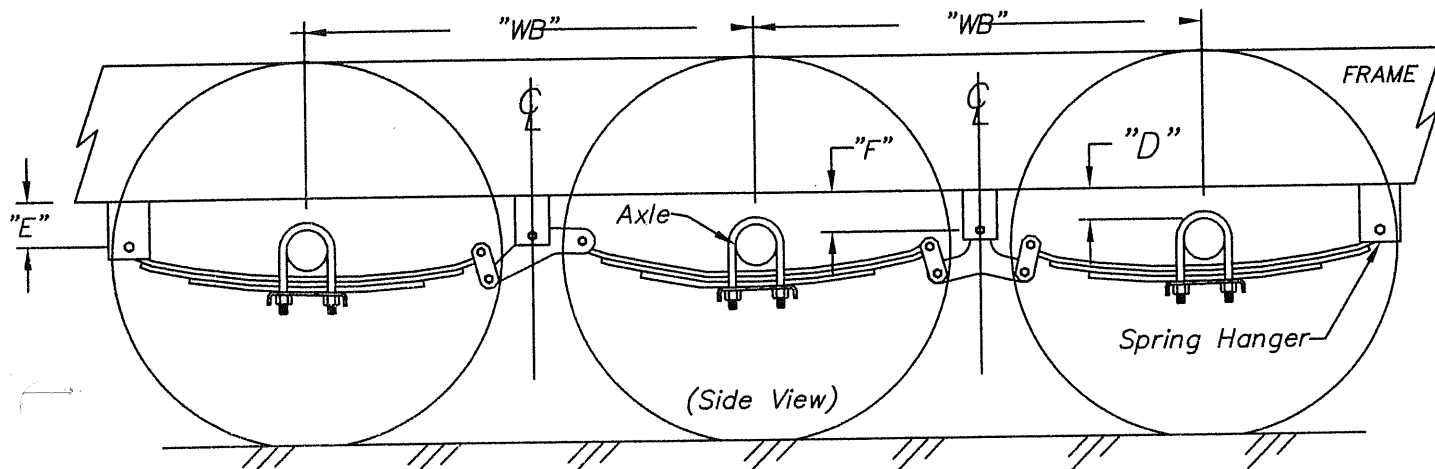

"D" Dimension "D" = _____ (Top of Axle to bottom of Frame)

Wheel Base "WB" = _____ ; Distance from outside edge of frame to tire side wall "T" = _____

Front spring hanger dimension "E" = _____ Center spring hanger dimension "F" = _____

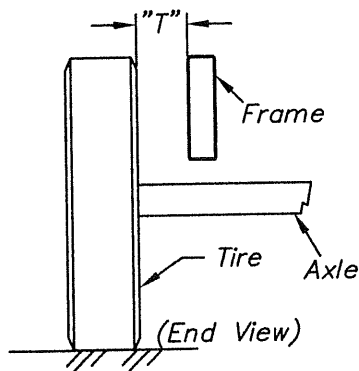

Double Eye spring _____



Slipper style spring _____

Vertical distance between holes on Equalizer "A" = _____ ; Horizontal distance "B" = _____

Is the axle above the leaf spring? Yes _____ No _____

Are Spring Eye Bolts equipped with grease zerks? Yes _____ No _____

Tire size and brand _____

Inspectors Name _____

Phone Number _____

Fax Number _____

By: TM 4/2002



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.