



T.I.P. Troubleshooting Information on Power Gear

INSTALLATION INSTRUCTIONS FOR A 800181S AND 800182S REPLACEMENT KITS.


1. Locate and disconnect the batteries and any power source to the unit.
2. Refer to original manufacturer service department for location of the slide-out relay control module.
3. Remove the 6-pin harness from the relay control by squeezing together the top of the plastic tabs on each side and pulling up from the control.
4. Note the color of each wire of the 6-pin control harness that connects to the units' wiring, then connect the same color wire of the replacement 6-pin harness (part # 14-1125) to the previous wire just cut.
5. When all of the replacement 6-pin harness connections are verified and complete, install the proper amp rating Slo-Blo fuse into the new control board if not already done.
6. Remove the mounting screws and the old control.
7. Remount the replacement control and reconnect the 6-pin connector to the control module.

Note: The wire harness connector is directional and may need rotating 180° for proper mating.

8. Reconnect batteries and/or power sources then test slideout operation.

Note: For control board fuse installs or replacement, use Slo-Blo fuse only. Call 574-537-8900 for fuse kit replacements.

UPDATED SLIDEOUT CONTROL SCHEMATIC FOR 14-1098 RELAY CONTROL

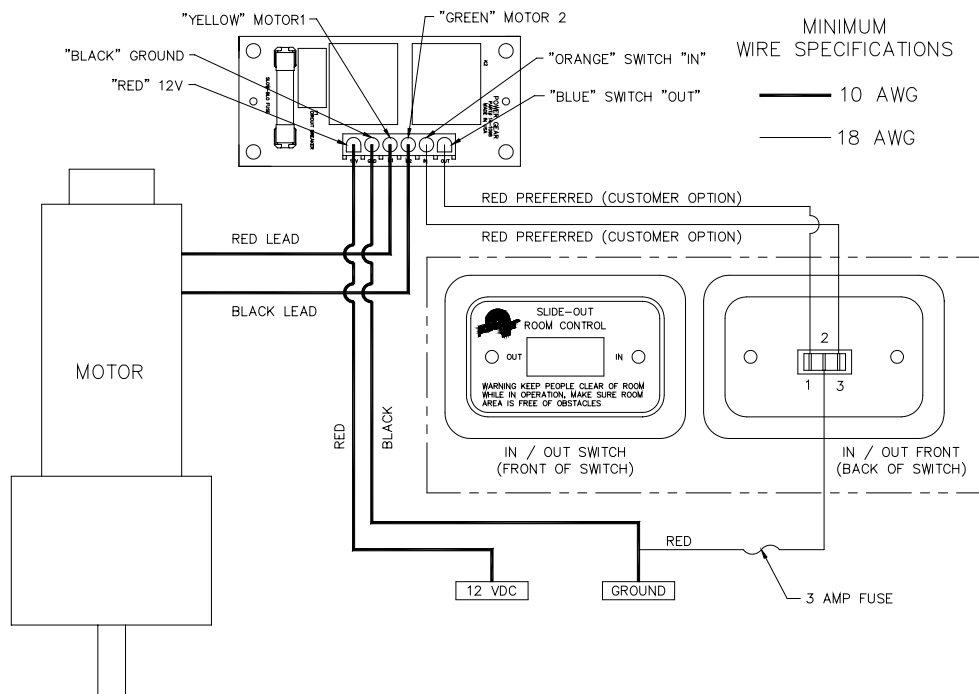



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.