




T.I.P. Troubleshooting Information on Power Gear

WIRING OF THE PUMP HARNASS P/N 500090

FOR SYSTEMS PRODUCED 1994-1998

1. The five leads are terminated with 1/4 female fast-on connectors, they should be connected one to each valve coil either spade and one to the fluid sensor on either lead. There is no special order that is required, all of these leads will be +12VDC.
2. Connect the 3/8 ring tongue to the incoming +12 VDC post of the pump motor solenoid along with the main power cable. This lead will have a 10 AMP Mini fuse inline.

WIRING OF THE +12 VDC HARNESS

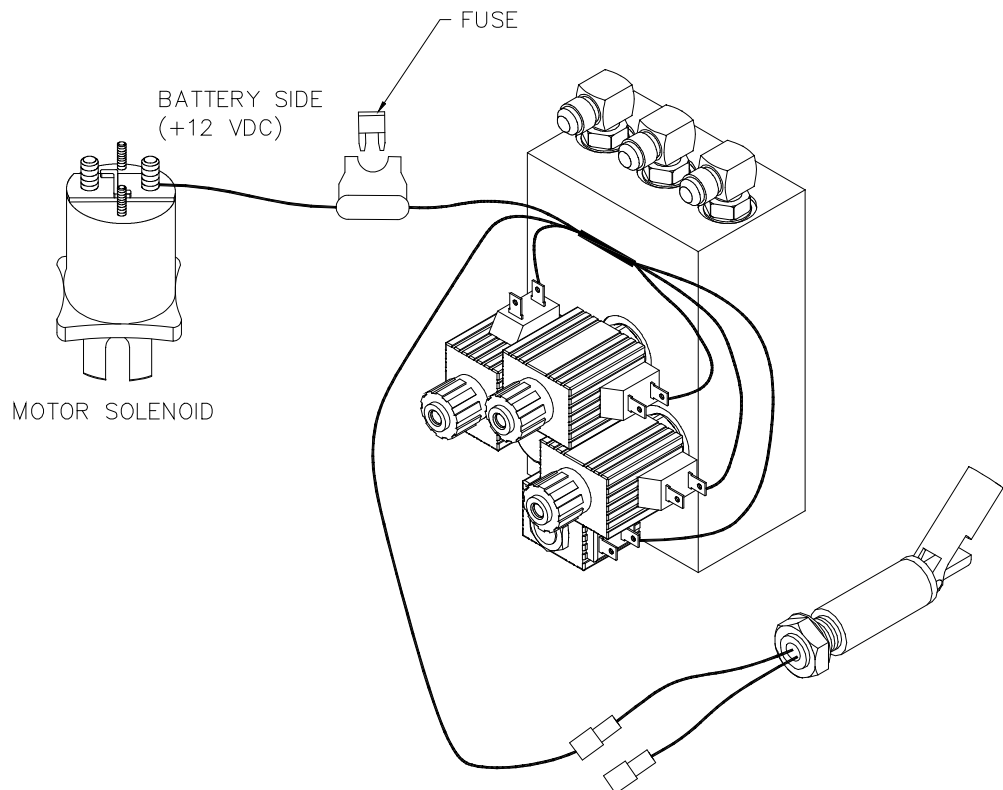



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.