


PRO CHECK SENSOR DIELECTRIC GREASE APPLICATION

Enclosed is a package of dielectric grease that has been provided to ensure your sensor pads make a good connection to the tank. It is suggested to apply dielectric grease **AFTER** syncing process has been completed. While not mandatory for use, it may improve performance at times.

DIRECTIONS:

1. Thoroughly clean the area on the tank where the Pro Check Sensor is being mounted.
2. Apply a pea sized bead of dielectric grease in the center of black sensor pad. (The pad is located between the (2) silver colored magnets, see photos below.)
3. Place sensor on tank per enclosed Pro Check installation instructions.

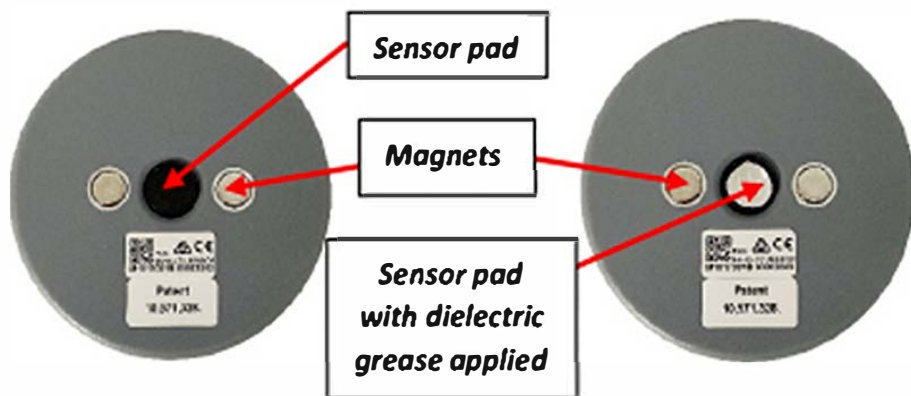



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.