

RNG-BATT-GEL12-100 (12V 100AH/20HR)

Gel Specifications



Renogy Gel batteries are capable of delivering high currents on demand and offer long service life with very low self-discharge. They are designed for frequent and cyclic discharge. They are suitable for various applications including electric vehicles, solar/wind energy system, UPS battery backup, telecommunication systems, medical equipment, and more.

Specifications

Capacity (25°C)	20Hr(5.0A,1.75V)	10Hr(9.3A,1.75V)	5Hr(17.0A,1.75V)	3Hr(25.7A,1.75V)
	100Ah	93Ah	85Ah	77.1Ah
Dimensions	Length	Width	Height	Total Height
	13.2 inches	6.8 inches	8.5 inches	8.6 inches
Approx. Weight	60 lbs. ± 3%			
Internal Resistance	7.1mΩ			
Self Discharge	≤2% per month (25°C)			
Charge Voltage 25°C	Cycle Use		Float Use	
	14.2V(-24mV/°C),max charge current:15A		13.5V(-18mV/°C)	
Operating Temperature	-25°C to 45°C			
Shelf Life	9 months at 25°C			
Material	ABS Containers and Covers			

Discharge Charts


Constant Current Discharge (Amperes) at 25°C

End Voltage (V/cell)	5min	10min	15min	20min	30min	45 min	1h	1.5h	2h	3h	5h	10h	20h
1.60	335.0	236.0	181.0	148.0	110.0	80.00	63.50	47.30	37.30	26.80	17.63	9.600	5.130
1.65	315.0	227.0	175.0	144.0	107.0	78.00	61.90	46.50	36.90	26.50	17.40	9.500	5.100
1.70	292.0	216.0	169.0	140.30	104.0	76.00	60.00	45.60	36.20	26.20	17.20	9.400	5.050
1.75	262.0	201.0	162.0	135.0	101.0	74.00	58.70	45.00	35.30	25.70	17.00	9.300	5.000
1.80	237.0	184.0	153.9	129.0	97.00	72.50	57.10	43.50	34.50	25.20	16.60	9.100	4.900

Constant Current Discharge (Watts) at 25°C


End Voltage (V/cell)	5min	10min	15min	20min	30min	45 min	1h	1.5h	2h	3h	5h	10h	20h
1.60	670.0	472.0	362.0	296.0	220.0	160.0	127.0	94.60	74.60	53.60	35.26	19.20	10.26
1.65	630.0	454.0	350.0	288.0	214.0	156.0	123.8	93.00	73.80	53.00	34.80	19.00	10.20
1.70	584.0	432.0	338.0	280.6	208.0	152.0	120.0	91.20	72.40	52.40	34.40	18.80	10.10
1.75	524.0	402.0	324.0	270.0	202.0	148.0	117.4	90.00	70.60	51.40	34.00	18.60	10.00
1.80	474.0	368.0	307.8	258.0	194.0	145.0	114.2	87.00	69.00	50.40	33.2	18.20	9.80

Cycle vs Depth of Discharge

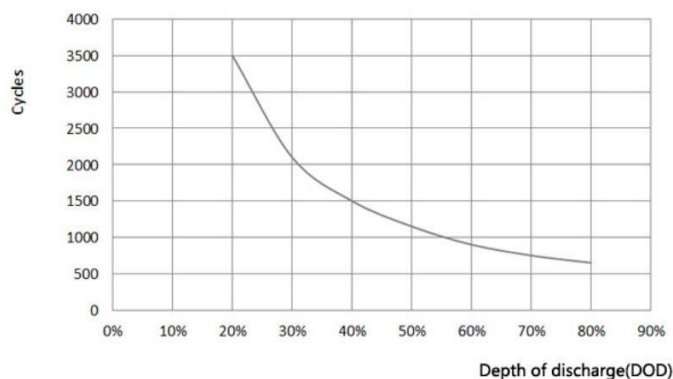


Cycle Vs Discharge depth

Temperature vs Capacity

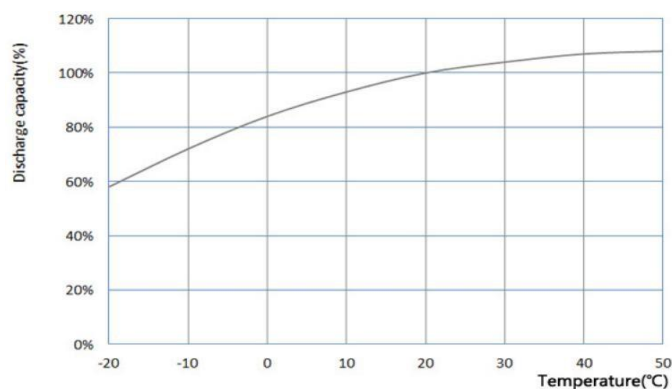


Temperature Vs capacity

Charge Performance

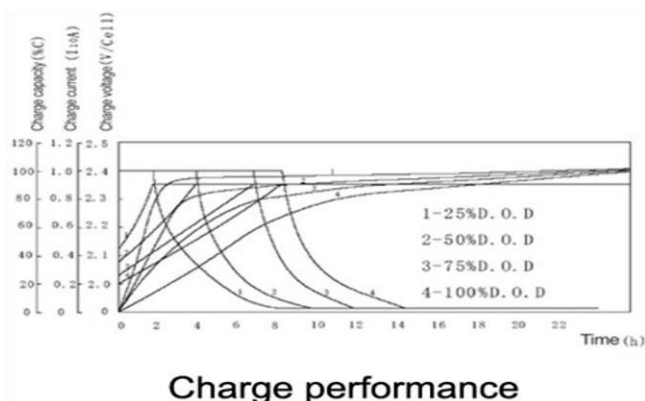

Charge performance

Designed Life vs Temperature

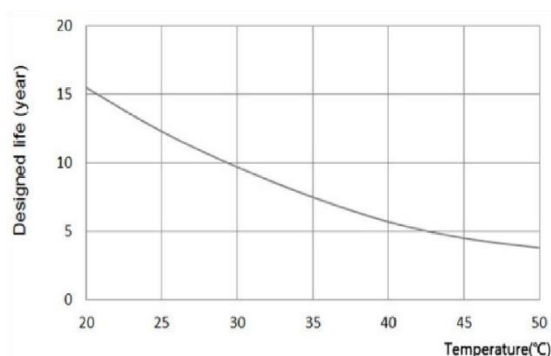

Designed life Vs temperature

Maintenance and Cautions

- Avoid over-discharging batteries, especially when they are in series connections
- Charge the batteries with recommended voltages, ensure the battery can be fully charged
- Generally, recharge capacity should be $1.1 \sim 1.5 \times$ the discharge capacity
- The effect of temperature on cycle charge voltage: $-4 \text{ mV} / ^\circ\text{C} / \text{Cell}$
- Length of cycle services is significantly affected by depth for discharge (primarily), along with ambient temperature, discharge rate, and the way the battery is recharged.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.