



INSTRUCTIONS FOR INFLATABLE MOUNTING KIT FOR (2) BOW BIMINI TOPS

Part No.: 61993

Kit Contains:

Quantity	Items
2	Deck mount patch assemblies
1	Tube PVC adhesive
1	6ft Adjustable strap assembly

Tools Required: Regular flat head screwdriver.

Step 1

Determine the position on your inflatable boat where you would prefer to mount the Bimini Top. (What area of the boat will it cover.) With that determined, check that there is enough "open" area on the top of each tube to mount the deck mount patch.

Step 2

With your boat deflated, Position the deck mount patch on the tube in the proper location. Use a pencil or marker to trace around the patch on both sides of the boat.

Step 3

Thoroughly clean these areas of the boat to remove any grease or dirt, clean under side of patch assemblies also.

Step 4 - GLUING

- Apply (2) successive layers of glue to the patch and onto the boat (in areas marked) allowing to dry in between each layer. (cover all areas completely)
- Position the deck mount patch assembly onto the glued area. NOTE: Make sure to align the deck mount parallel with the boat tubes, with screw head facing out. Once in place the mount is not removeable.
- Rub the patch down thoroughly to ensure all surfaces have adhered properly.
- Repeat for 2nd deck mount patch assembly.
- Allow to dry for 24 hours before inflating your boat.


• **WARNING:** KEEP GLUE OUT OF REACH OF CHILDREN. USE ONLY IN A WELL VENTILATED AREA. AVOID PROLONGED BREATHING OF VAPORS. DO NOT USE NEAR HEAT OR FLAMES. DO NOT SWALLOW AND AVOID CONTACT WITH SKIN OR EYES.

Step 5

Position the stern of the top toward the rear of the boat and attach the eye end on the side tubes on each side, to the deck mounts using the screws that are provided in the deck mounts themselves. Secure but do not overtighten.

Step 6

Have another person hold the top in unfolded position and locate the places where you will attach the four tie down straps. These should be as far out as practical so that the top spreads out when the tie down straps are tightened. At the same time making sure that there is enough adjustment in the straps to loosen and tighten. Depending on the construction of your boat and availability of places to secure the straps, you may want to only use (1) tie down strap in the front. Your top has an additional opening in the front for the re-location of the strap to the center. It may be necessary to adjust the tension of the tie down straps to ensure that the top is taut and does not sag.

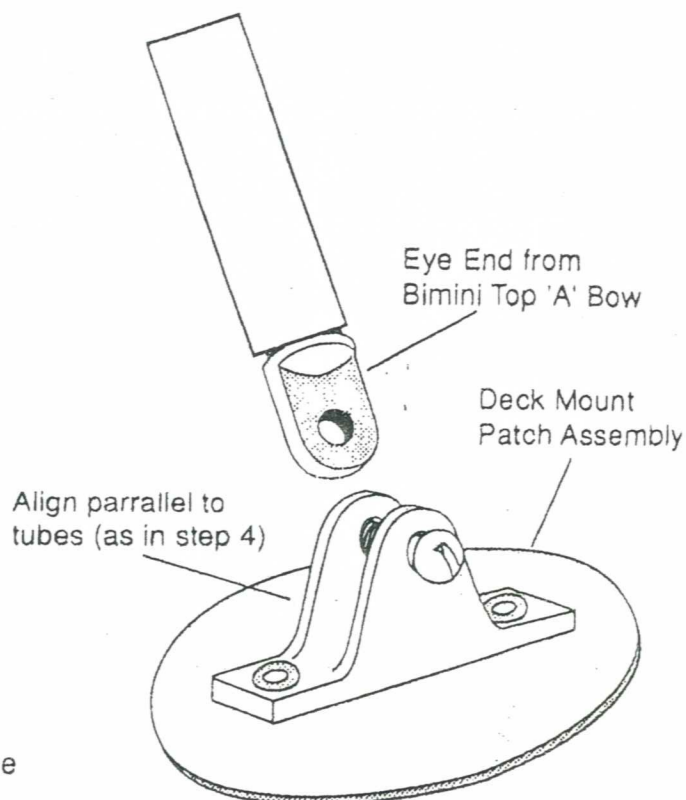



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.