

RV Toilet Service Parts for Aria CLASSIC

Tools Needed

- Adjustable wrench
- 7/16" wrench
- Flat-blade screwdriver
- Pliers
- Towels

Notes

- Read all instructions before beginning work.

To Remove Toilet

1. Turn off RV water supply per RV Owner's Manual.
2. Pry off Bolt Caps with flat-blade screwdriver.
3. Use wrench to remove 7/16 -inch Lag Screws.
4. Disconnect Water Supply Line with adjustable wrench.
5. Place an old towel or soft cloth on work surface. Remove Toilet from floor and place upside down, with front facing you, on work surface.
6. Remove old Closet Flange Seal (may be found on Toilet or in floor at Closet Flange). Discard.
7. Cover Holding Tank opening to contain odor.

To Remove Old Part

Note: Before removing/replacing parts, note which parts are broken. This kit contains parts that make up the pedal assembly and you may use all the parts necessary to make the fix. The following procedure assumes only the pedal is broken and needs to be replaced.

1. Actuate Pedal and hold. If damage to pedal will not allow this, pull open Left Cam Arm (Fig. A). With other hand, hold Water Valve Actuator in open position (Fig. B) to release tension from Cable. Release Pedal (if used to open Cam Arm). Push Left Cam Arm back in (Fig. A) and disconnect Cable End from it.
2. Actuate Pedal again, fully, and hold. If damage to pedal will not allow this, pull open Right Cam Arm (Fig. A). Hold Blade Actuator in open position (Fig. B). Release Pedal to release tension from Cable. Push Right Cam Arm back in (Fig. A) and disconnect Cable End from it.
3. Facing front of toilet, use screwdriver to pry out left side of Pedal Arm at pivot point in Pedal Bracket (Fig. A).
4. Remove Pedal. Discard.



To Replace Part

1. Replace Pedal. Insert right side of Pedal in Pedal Bracket

Pedal Package

Part No. 19837 White

Part No. 19838 Bone

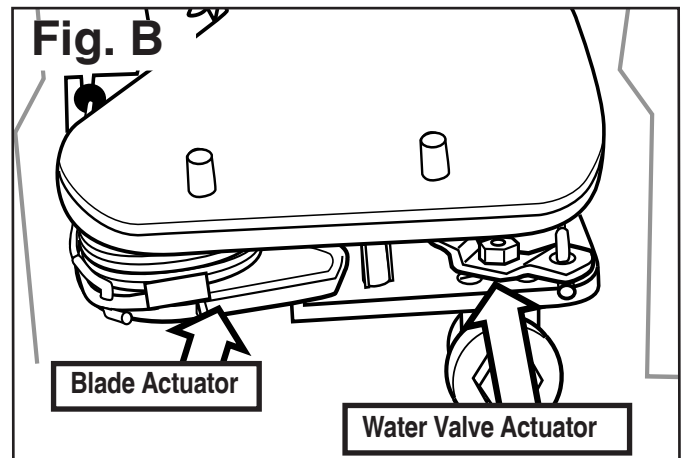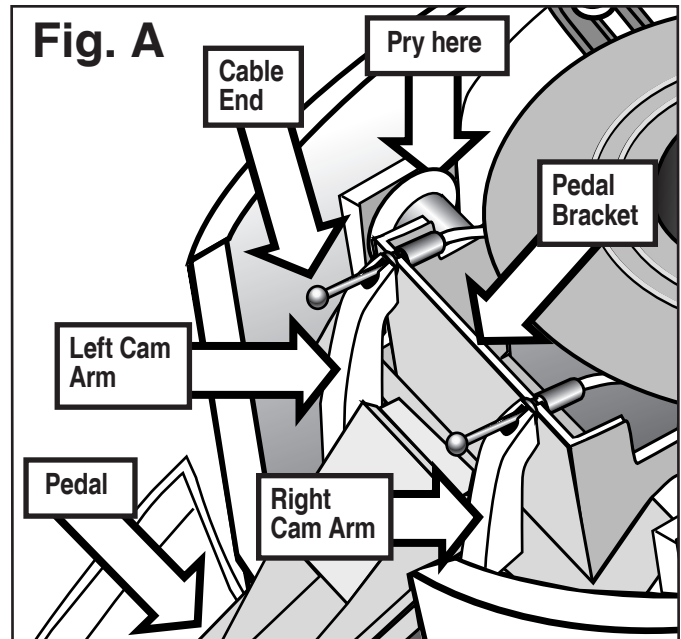

(Fig. A). Guide left side into Pedal Bracket. Snap in.

2. Apply Lubricant to inside of Cam Arms.
3. Making sure Sheaths are firmly attached to Pedal Bracket, reattach Cables to Pedal Cam Arms.

To Reinstall Toilet To Floor

1. Install new Closet Flange Seal to Toilet Mounting Flange, lip side outward. Friction holds it in place.
2. Depress Pedal all the way and insert a chock above it to keep Mechanism Blade open. Sighting through bowl opening to assure holes line up, position Toilet over Closet Flange.
3. Reconnect Water Supply Line.



RV Toilet Service Parts *for* Aria CLASSIC

Part No. 19837/8 Pedal Package, continued

4. Bolt Toilet to floor with Lag Screws. Tighten.
5. Turn on RV's water supply. Flush test.
6. Install Bolt Caps.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.