

010-0200
Non-Locking L-Handle



010-0300
Locking L-Handle



DESIGNED FOR:

- General purpose use for off-highway cab doors or storage, compartment and access doors for on or off-highway applications

FEATURES/BENEFITS:

- Ample finger clearance
- Easily installed with oval or flat head #10 fasteners (not included)
- Locking L-handle assembly provides 360° rotation and locks at 90° increments

Global Locations:

TriMark Corporation
500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com

TriMark Europe
Cedar Court
Walker road
Bardon Hill
Coalville LE67 1TU
United Kingdom
Tel: +44(0)1530 512460
Fax: +44(0)1530 512461
www.trimarkeu.com

TriMark (Xuzhou)
Building A5 Jingwu Road
Xuzhou Economic
Development Zone
Xuzhou, Jiangsu
221004 PR China
Tel: +86 516 8773 0018
Fax: +86 516 8773 0058
www.trimarkcn.com



TriMark. Interactive. Product. Selector



TriMark



TriMark Corporation



010-0200 Non-Locking L-Handle 010-0300 Locking L-Handle

AVAILABLE:



- Mounting hole patterns and escutcheons (bases) for different finger clearances
- Drive bar lengths, with or without holes or threaded rods
- Keyed CH751 and other key codes
- Drive bar attached to handle by drilling and pinning
- Locking or non-locking:
 - ◊ Standard finger clearance (Type 1 and 2)
 - ◊ Extended finger clearance (Type 4)
- 1.50" (3.81mm) or 1.75" (4.45mm) mounting hole spacing

SPECIFY WHEN ORDERING:



- Series number
- Escutcheon type
- Drive bar length (L1) and optional hole location (L2)

For more information visit
www.trimarkcorp.com

Standard Finger Clearance (Type 1)

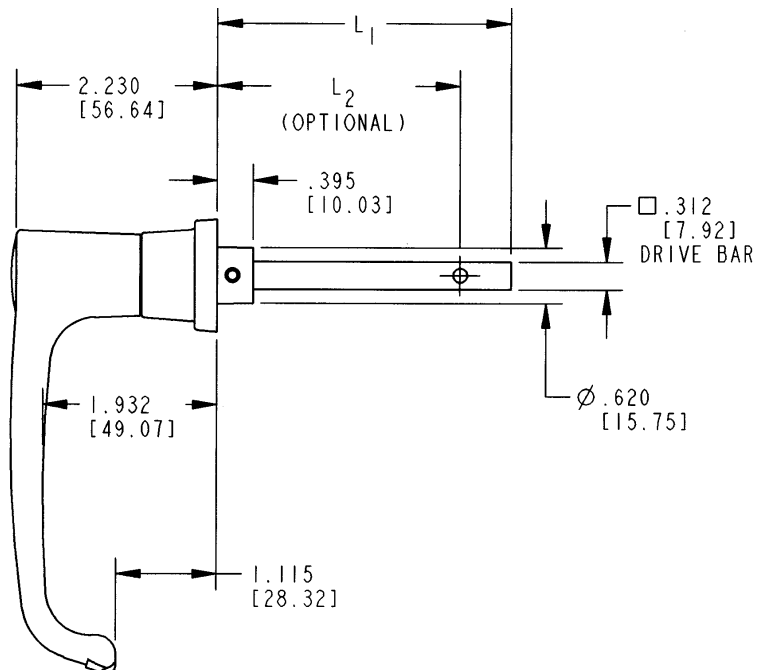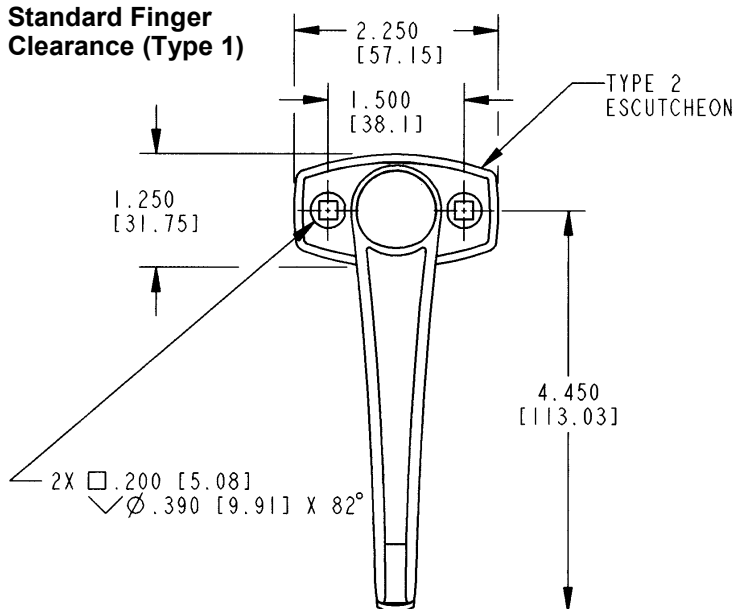

Standard Finger Clearance (Type 2)

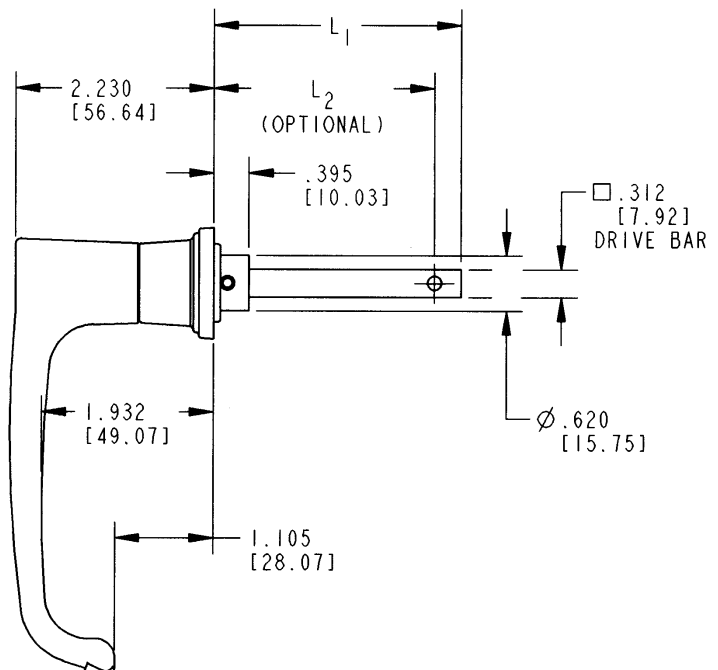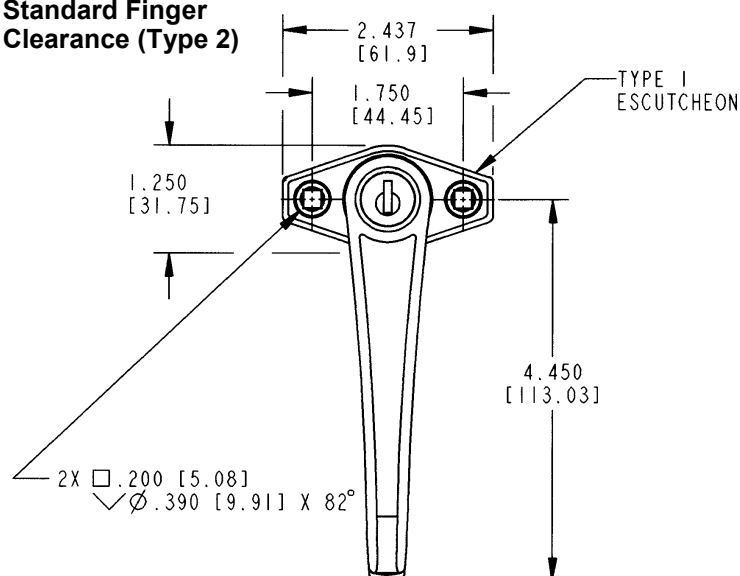



010-0200 Non-Locking L-Handle 010-0300 Locking L-Handle

MATERIAL:



- Handle and escutcheon: die cast zinc alloy
- Drive bar: mild steel

FINISH

- Handle and escutcheon: copper-nickel chrome plated; or black powder coated
- Drive bar: mill finish

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

Extra Finger Clearance (Type 4)

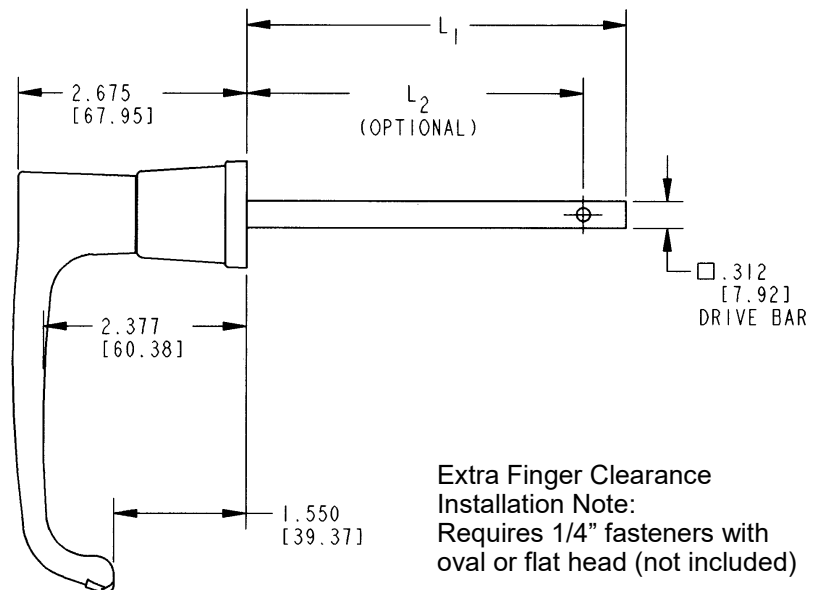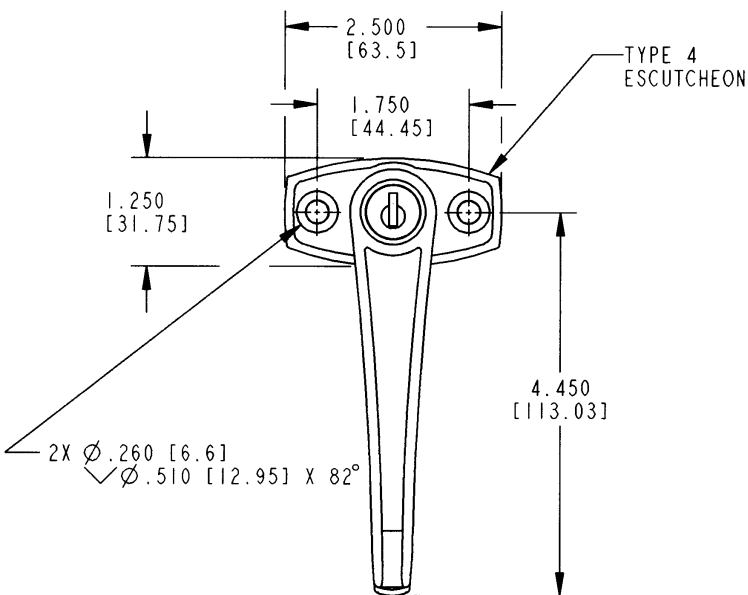

Extra Finger Clearance
Installation Note:
Requires 1/4" fasteners with
oval or flat head (not included)



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.