

010-0600  
Flush Mounted  
Pop-Up T-Handle



**DESIGNED FOR:**

- Toppers and liftgate doors, garage doors, storage and access doors
- Any application where low profile hardware is important

**FEATURES/BENEFITS:**

- Flush mounted - when "T" handle is depressed, rivets and fastener heads are concealed
- Rubber gasket under base provides resistance to water infiltration

**Global Locations:**

**TriMark Corporation**  
500 Bailey Avenue  
P.O. Box 350  
New Hampton, Iowa 50659  
United States  
Tel: 641-394-3188  
Fax: 641-394-2392  
1-800-447-0343  
[www.trimarkcorp.com](http://www.trimarkcorp.com)

**TriMark Europe**  
Cedar Court  
Walker road  
Bardon Hill  
Coalville LE67 1TU  
United Kingdom  
Tel: +44(0)1530 512460  
Fax: +44(0)1530 512461  
[www.trimarkeu.com](http://www.trimarkeu.com)

**TriMark (Xuzhou)**  
Building A5 Jingwu Road  
Xuzhou Economic  
Development Zone  
Xuzhou, Jiangsu  
221004 PR China  
Tel: +86 516 8773 0018  
Fax: +86 516 8773 0058  
[www.trimarkcn.com](http://www.trimarkcn.com)



TriMark. Interactive. Product. Selector



TriMark



TriMark Corporation



# 010-0600 Flush Mounted Pop-Up T-Handle

## AVAILABLE:

- Key lockable with 50 key codes available or keyed alike. Non-locking version is also available
- One or two point locking
- 90° or 150° rotation
- 2.500" (63.5mm) or 3.500" (88.9mm) drive bar lengths
- Clockwise or counterclockwise rotation

## MATERIAL:

- Shuttered keyway: stainless steel
- All major components: zinc alloy
- Drive bar: zinc plated steel
- Internal (2) springs: stainless steel

## FINISH


- Black powder coated or white

## INSTALLATION:

- Easy installation with (2) #10 fasteners or rivets
- Recommended door mounting - 1.125" (28.6mm) diameter thru hole

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

For more information visit  
[www.trimarkcorp.com](http://www.trimarkcorp.com)

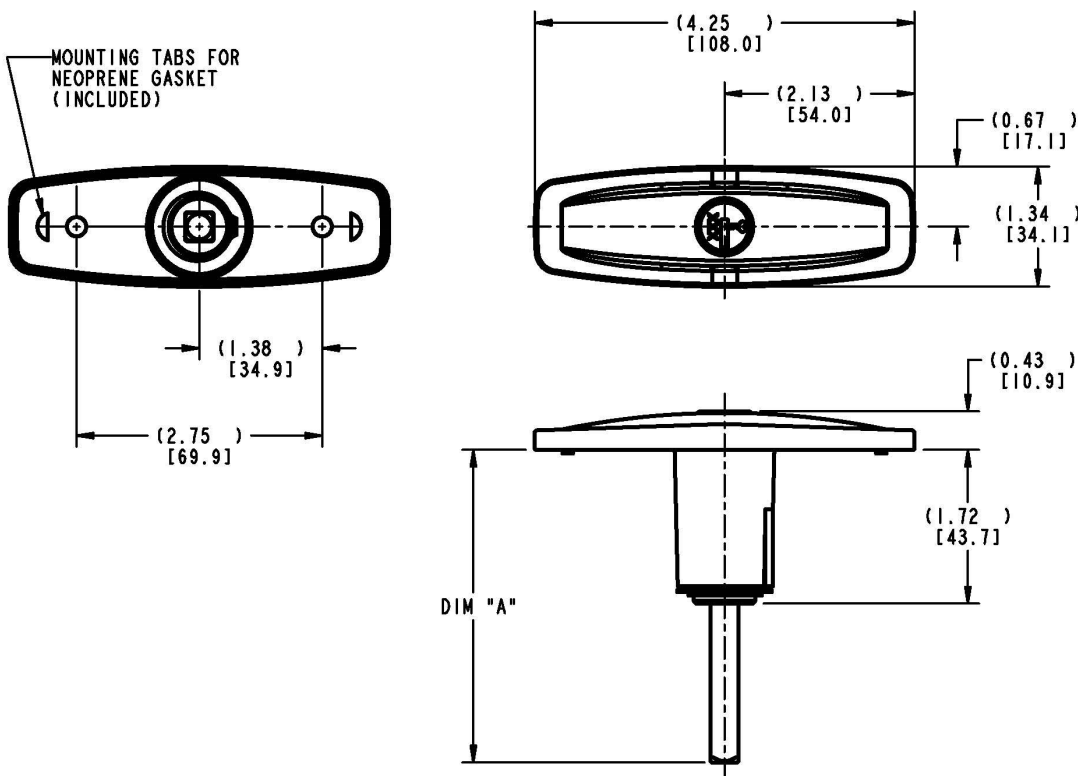

DRIVE BAR CHART  
DIMENSION "A"  
250 [63.5]  
350 [88.9]



### USE WITH: Throw Rods

- Available in sturdy .312" (5/16") diameter cut, shaped and formed to your specific length
- Finished in bright zinc plated steel
- Support brackets included
- Can be ordered separately or pre-assembled to inside release lever
- Minimum order quantities will apply

### Inside Release Lever

- Available with rods and inside release lever fully assembled and ready to install or shipped bulk with components separate for you to assemble at your plant

| Minimum Installation<br>(Clearance) Height |               |
|--------------------------------------------|---------------|
| Angle of Door                              | Dim. A        |
| 25°                                        | 1.969 [50.01] |
| 20°                                        | 1.781 [45.24] |
| 15°                                        | 1.594 [40.49] |
| 10°                                        | 1.594 [40.49] |
| 5°                                         | 1.250 [31.75] |
| Vertical                                   | 1.125 [28.58] |

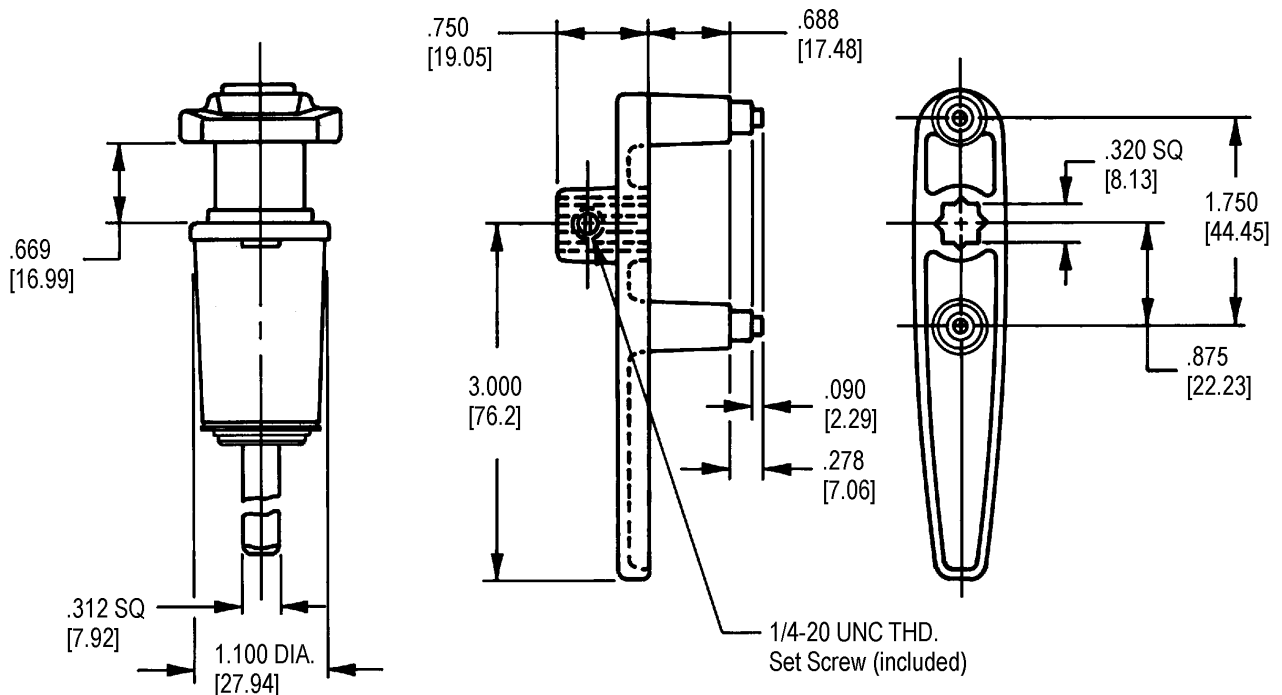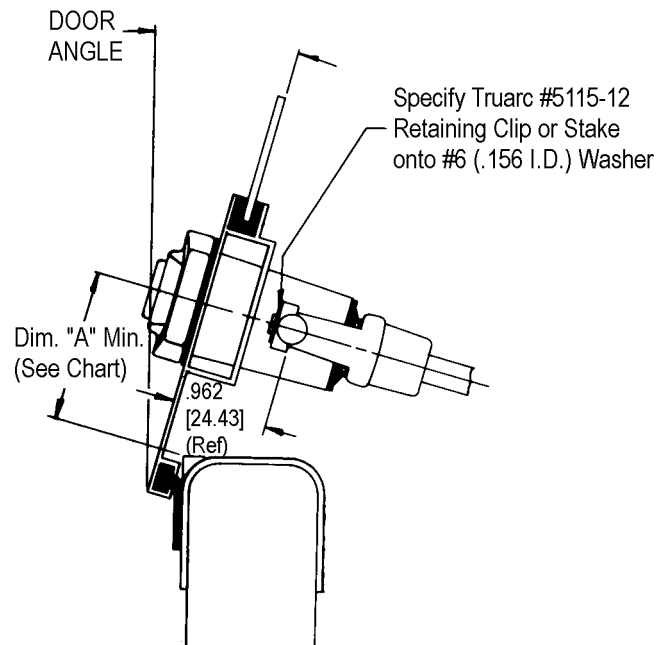

**INSIDE RELEASE LEVER**

---



---

# This manual is provided courtesy of **RV Tech Cheat Sheet**



**Professional resources for the whole RV industry — free.**

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.

---



---

**[rvtechcheatsheet.com/manuals](https://rvtechcheatsheet.com/manuals)**

**Find thousands more RV manuals, wiring diagrams and parts lists**

**RV techs:** share fixes, ask questions and learn from each other.

**Join our free Facebook group →**

---



---

Follow proper safety practices. If in doubt, consult a professional RV technician.