

050-0502 Single Rotor Mini Latch with Extended Actuator



This Single Rotor Latch is a sub-platform to the TriMark proven 050-0500 series latch and is designed for light to medium-duty applications for on or off highway compartments and access panels. It features an extended trip mechanism for applications where it is desirable to have the release mechanism directly in-line with the latch.

DESIGNED FOR:

- Door closing forces of 15-20 lbs. (6.8-9.0 kg) recommended for best results. Not to exceed 50 lbs. (23 kg)
- Release efforts are approximately proportional to door closing forces striker bolt load
- Use with TriMark 0070-0300 Striker Bolt

Global Locations:

TriMark Corporation
500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com

TriMark Europe
Cedar Court
Walker road
Bardon Hill
Coalville LE67 1TU
United Kingdom
Tel: +44(0)1530 512460
Fax: +44(0)1530 512461
www.trimarkeu.com

TriMark (Xuzhou)
Building A5 Jingwu Road
Xuzhou Economic
Development Zone
Xuzhou, Jiangsu
221004 PR China
Tel: +86 516 8773 0018
Fax: +86 516 8773 0058
www.trimarkcn.com



TriMark. Interactive. Product. Selector



TriMark



TriMark Corporation



050-0502 Single Rotor Mini Latch With Extended Actuator

FEATURES/BENEFITS:

- Variety of release mechanisms that can be used as finger releases, direct contact or in-line trip mechanisms for application flexibility
- Compact size
- Low cost
- Single or two position rotary style latching action

AVAILABLE:

- Right and left hand configurations (right hand shown)
- With 1/4-20 UNC, M6 x 1 threaded axles or .286 (7.3mm) thru axles
- Base mounting option

MATERIAL:

- Internal latch components and case halves: high-strength steel
- Springs: non-corrosive stainless steel

FINISH:

- Zinc plated, clear chromate and steel components


INSTALLATION:

- (2) 1/4-20 UNC or M6 mounting fasteners (not included)
- Custom mounting brackets available
- Tighten to the manufacturers' recommended torque value, however, do not exceed 100 in-lbs. (11.2 N-m)

CAUTION: Latch does not meet FMVSS 206 (ECE R11) load requirements.

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

For more information visit
www.trimarkcorp.com

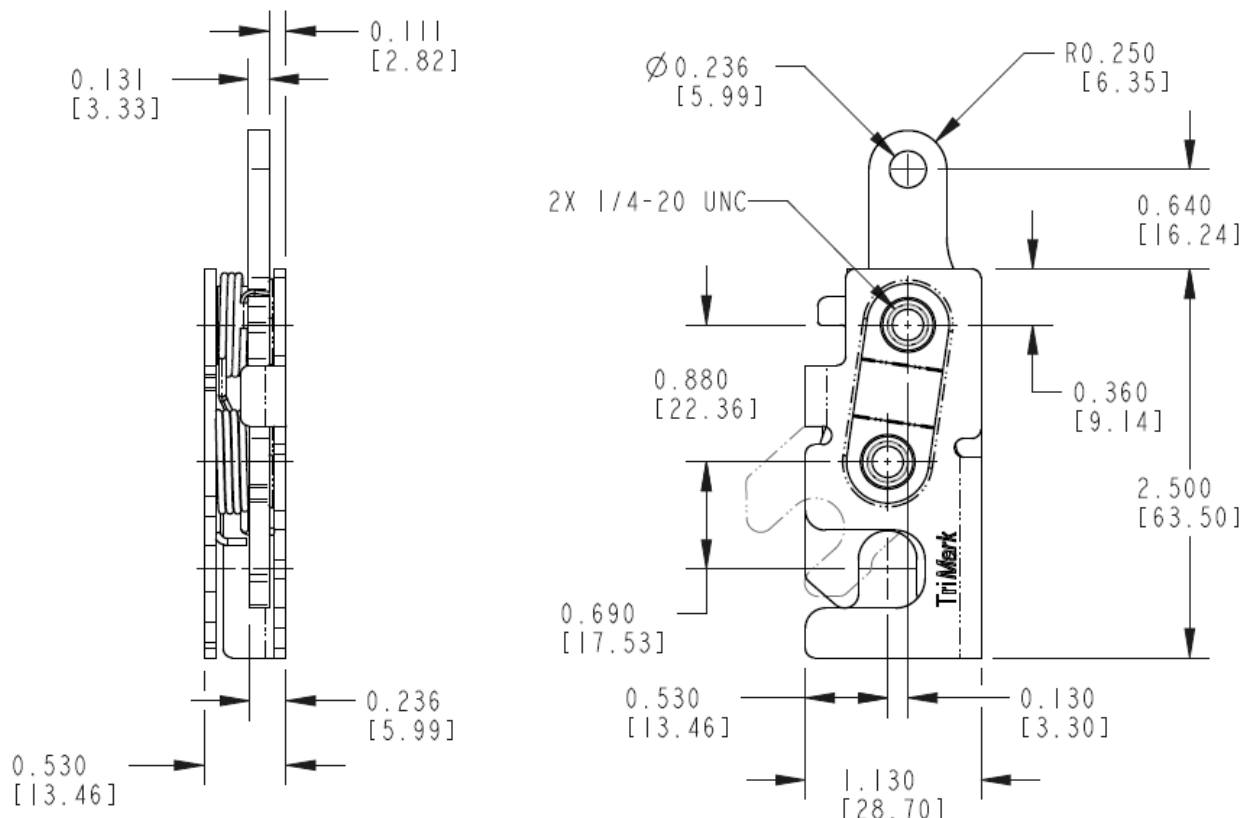



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.