

050-1300 Plastic Slam Latch



Designed to secure a variety of storage, compartment and access doors for off-road vehicles. The robust construction and compact size at a very cost effective price make it a great choice for light duty compartment door applications

FEATURES/BENEFITS:

- Slam action latch is non-handed
- Small size will work in a variety of small compartments and applications
- Simple, cost-effective latch offers an alternative to standard rotary latches
- Operation - dual plungers allow the rod to enter into the latch as normal slam action. Slide rod axially to release
- Reduced operating efforts under load
- Reduced operating noise and rattle when compared to zinc/steel products
- Engineered plastic withstands corrosion and has a lower coefficient of friction, reducing closing and operating efforts
- Strike diameter .375" (9.5mm)

Global Locations:

TriMark Corporation
500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com

TriMark Europe
Cedar Court
Walker road
Bardon Hill
Coalville LE67 1TU
United Kingdom
Tel: +44(0)1530 512460
Fax: +44(0)1530 512461
www.trimarkeu.com

TriMark (Xuzhou)
Building A5 Jingwu Road
Xuzhou Economic
Development Zone
Xuzhou, Jiangsu
221004 PR China
Tel: +86 516 8773 0018
Fax: +86 516 8773 0058
www.trimarkcn.com



TriMark. Interactive. Product. Selector



TriMark



TriMark Corporation

INSTALLATION:

- Easy to install with (2) M6 thread forming fasteners (available—not included)


MATERIAL:

- Engineered injection molded plastic
- Non-corrosive stainless steel springs
- Internal stamped steel reinforcement plate

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

CAUTION: Latch does not meet FMVSS 206 (ECE R11) load requirements.



For more information visit
www.trimarkcorp.com

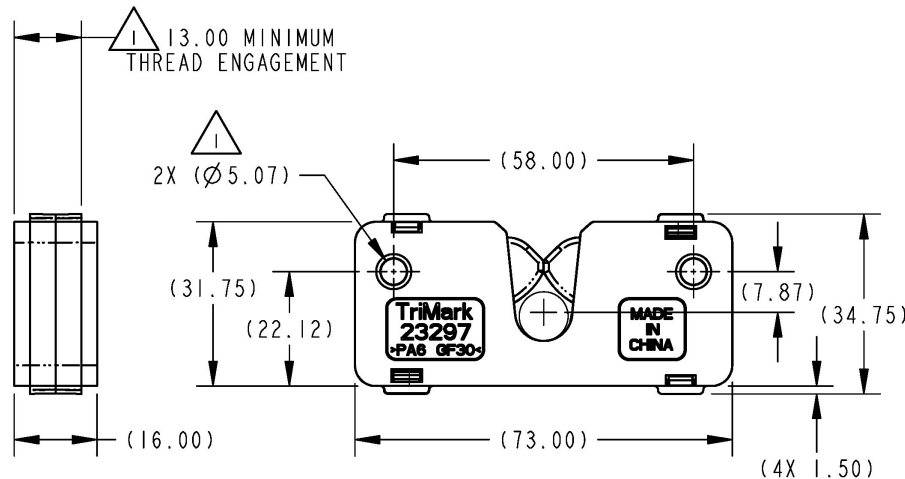

NOTES: UNLESS OTHERWISE SPECIFIED

- RECOMMEND MOUNTING WITH TRIMARK PART NUMBER 22031-01 (M6 TYPE DELTA POINT THREAD FORMING SCREWS) WITH 13.00 MM MINIMUM THREAD ENGAGEMENT. MOUNTING TORQUE NOT TO EXCEED 7.5 Nm (66 IN-LBF).

- CAUTION: CASE HALF SEPARATION MAY OCCUR WHEN THREADING A SCREW INTO THE LATCH IF THE OPPOSITE SIDE CASE HALF IS NOT HELD RIGID.

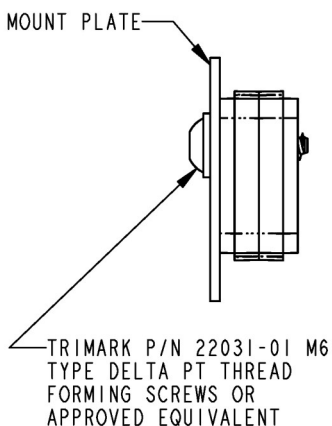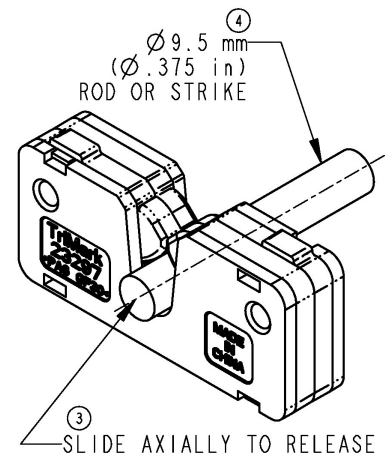

MOUNTING OPTION



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.