

510-0100 e-FOB Receiver (Unsealed)



DESIGNED FOR:

- Replacement components of TriMark's e-ASK systems

Global Locations:

TriMark Corporation
500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com

TriMark Europe
Cedar Court
Walker road
Bardon Hill
Coalville LE67 1TU
United Kingdom
Tel: +44(0)1530 512460
Fax: +44(0)1530 512461
www.trimarkeu.com

TriMark (Xuzhou)
Building A5 Jingwu Road
Xuzhou Economic
Development Zone
Xuzhou, Jiangsu
221004 PR China
Tel: +86 516 8773 0018
Fax: +86 516 8773 0058
www.trimarkcn.com



TriMark. Interactive. Product. Selector



TriMark



TriMark Corporation

FEATURES/BENEFITS:

- 12V DC operation
- Rugged and durable construction
- Available with 4-button and 2-button FOBs
- Compliant to on-road, off-road, and industrial environmental requirements
- Variations for single or multiple door control
- Compatible with 433 MHz Radio frequency (RF) remote transmitter fob
- Compliant to FCC, IC, and EU RF requirements
- Available with security system, lighting control, keypad connectivity, ignition connectivity, and other auxiliary device control
- Customizable via various hardware configurations or software modifications

AVAILABLE:

- Three different programming functions; standard mode, cargo mode and sustained mode. Modes provide customized remote fob transmitter use.
 - ◊ Standard mode allows for the lock/unlocking of doors plus panic mode and one auxiliary output (controls lighting, opens compartment etc.)
 - ◊ Cargo mode allows for the lock/unlocking of main personnel doors plus independent control of many cargo/compartments doors
 - ◊ Sustained mode allows for the lock/unlocking of doors plus continuous output control with lower buttons pressing
- Customized graphics possible (buttons and logos - please inquire)
- Customized wire harnesses

USE WITH:



Electronic Products and Accessories

- TriMark 500-1100 e-FOB System
- TriMark 530-0100 e-FOB Transmitter

INSTALLATION:

- e-FOB receiver is easily installed with (2) #10 or M5 Fastener (not included) and can be mounted in a concealed location
- Standard 12V DC power

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

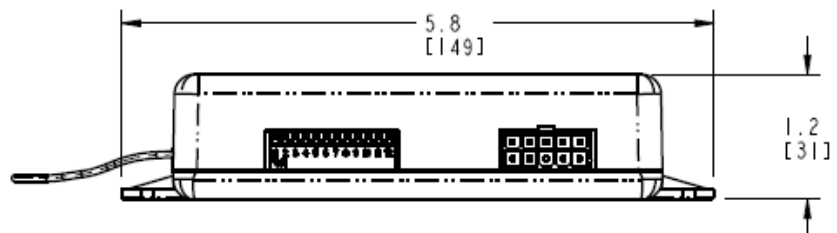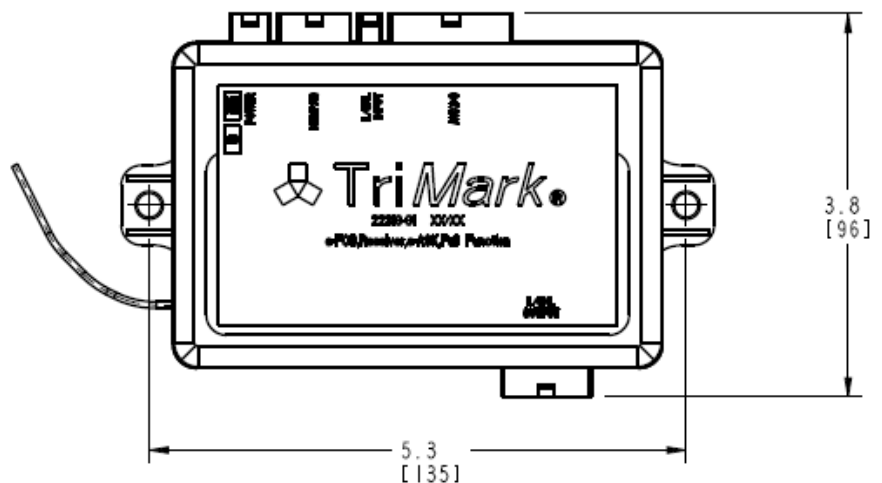

For more information visit
www.trimarkcorp.com



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.