

5TH WHEEL CONFIGURATION CHART

This chart is accurate for most newer configurations. However, we do NOT guarantee that the indicated hitches will work in all setups.

ULTIMATE 5TH WHEEL CONNECTIONS

RANCH HITCH ADAPTERS

TRUCK BED SIZE				BED CONFIGURATION			SOLID PIN BOX		MOVABLE PIN BOX							
5.5'	6.5'	8'	Flatbed**	Industry Standard Rails	Gooseneck Ball	Puck System	Under 30"	Over 30"	MORryde	Air Bag Style	Rota-Flex	Airborne	Pivoting Style	Rotating Style	Gooseneck Adapter	Gen-Y Shock Absorbing
																
YES ⁴	YES	YES	NO	YES	NO	YES ¹	YES	YES	YES ⁵	YES	YES with Rota-Flex Lockout Kit	YES if locked straight	YES if locked straight	NO	NO	NO
YES ⁶	YES	YES	NO	NO	YES with 2-5/16" ball (see chart on back page)	YES with Andersen Bed Shaft or 2-5/16" ball (see chart on back page)	YES	YES	YES ⁵	YES	YES with Rota-Flex Lockout Kit	YES if locked straight	YES if locked straight	NO	NO	NO
YES ⁴	YES	YES	NO	NO	YES with 2-5/16" ball (see chart on back page)	YES with Andersen Bed Shaft or 2-5/16" ball (see chart on back page)	YES	YES	YES ⁵	YES	YES with Rota-Flex Lockout Kit	YES if locked straight	YES if locked straight	NO	NO	NO
YES ⁴	YES	YES	NO	NO	YES with 2-5/16" ball (see chart on back page)	YES with Andersen Bed Shaft or 2-5/16" ball (see chart on back page)	YES	YES	YES ⁵	YES	YES with Rota-Flex Lockout Kit	YES if locked straight	YES if locked straight	NO	NO	NO
NO	NO	NO	YES ²	NO	YES with 2-5/16" ball (see chart on back page)	NO	YES	YES	YES ⁵	YES	YES with Rota-Flex Lockout Kit	YES if locked straight	YES if locked straight	NO	NO	NO
NO	NO	NO	YES ²	NO	YES with 2-5/16" ball (see chart on back page)	NO	YES	YES	YES ⁵	YES	YES with Rota-Flex Lockout Kit	YES if locked straight	YES if locked straight	NO	NO	NO
NO	YES	YES	NO	YES ¹	YES with 2-5/16" ball	YES with 2-5/16" ball	YES	YES ³	YES ¹	NO	NO	NO	NO	NO	NO	NO
YES	YES	YES	NO	YES ¹	YES with 2-5/16" ball	YES with 2-5/16" ball	NO ³ Fits pin boxes of 22" or less	NO	YES ¹	NO	NO	NO	NO	NO	NO	NO

1. Adapters are available from the pin box or rail manufacturer

2. Works with recessed ball

3. Gusset recommended

4. 3200, 3220 & 3220TBX: The Rail Mount #3200 and Standard Ultimate Connection #3220 (and 3220TBX toolbox version) may not provide enough clearance in trucks with higher side rails.

5. MORryde Pin Box: This is compatible with all versions of the Ultimate Connection ONLY when it is installed with MORryde part #: RPB77-006.

6. The Raised Ultimate Connection #3217 is recommended for trucks with higher side rails, ONLY if the Standard Ultimate Connection #3220 does not provide enough clearance.

ULTIMATE CONNECTION COUPLER TUBE CHART


CONNECTING THE ULTIMATE CONNECTION BASE TO THE GOOSENECK BALL

3220, 3220-TBX, & 3217 (RAISED)


IMPORTANT:
ALWAYS SPECIFY IF TOP OF
BALL IS **ABOVE** OR **BELOW**
TRUCK BED.



If your ball has a flat top,
subtract 1/8" from these
ball height measurements
(e.g. 3-3/4" becomes 3-5/8").

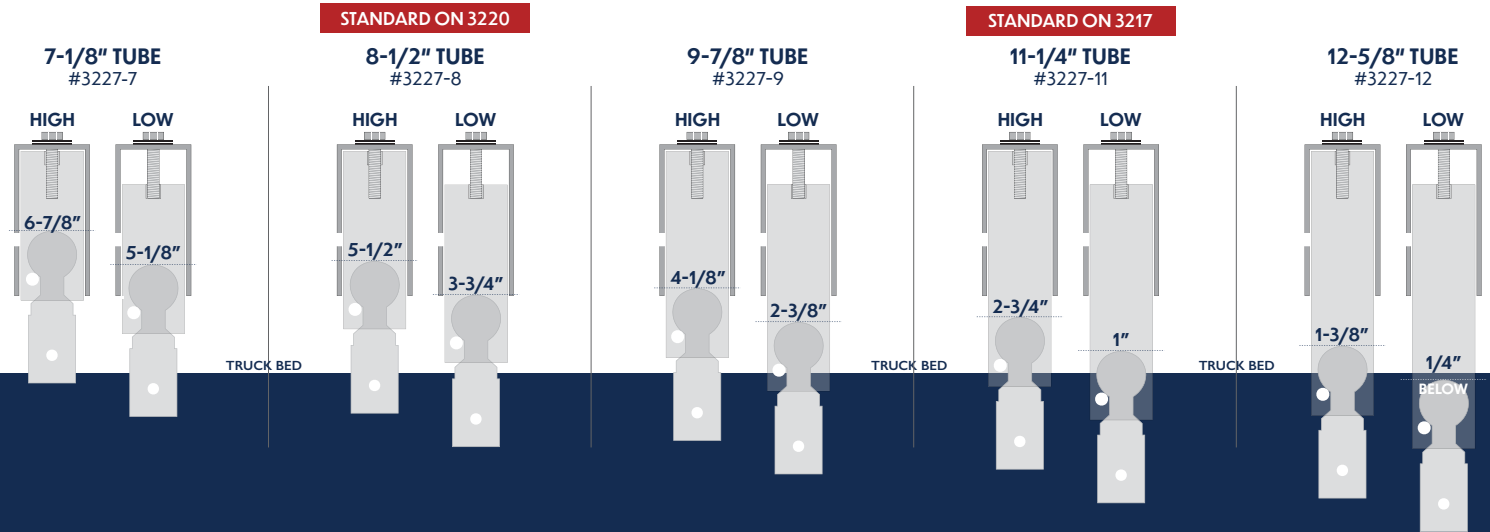

3221 & 3221-TBX (LOWERED)

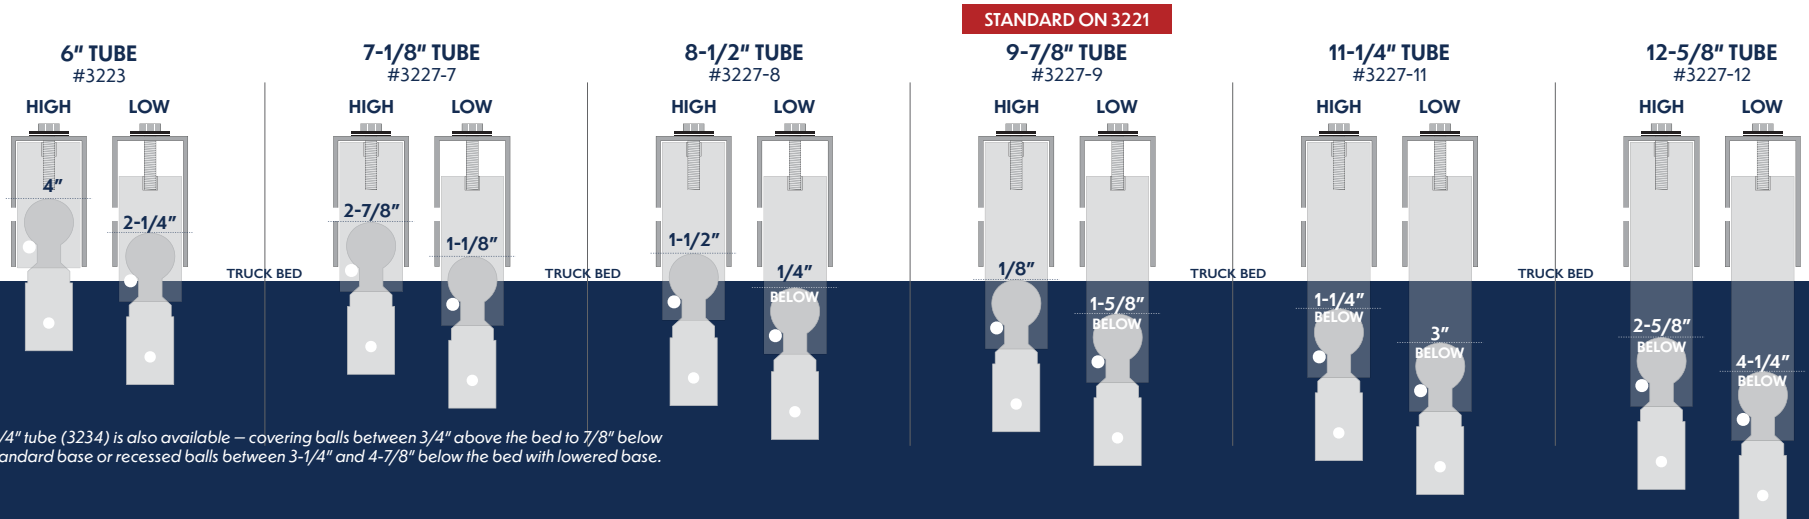

*Extended 13-1/4" tube (3234) is also available – covering balls between 3/4" above the bed to 7/8" below the bed with standard base or recessed balls between 3-1/4" and 4-7/8" below the bed with lowered base.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.