


WINEGARD® SKA-004 TRAV'LER® Roller Plate Installation Instructions

1. Once the TRAV'LER is installed, raise the unit to allow access to the roof. (Refer to **Raising Antenna** on back of sheet, or the TRAV'LER installation manual, for directions to raise the antenna.)

2. From the back lip of the transition plate, (see figure below.)

- a. (SK-3005) = 19 inches.
- b. (SK-1000) = 19 inches.
- c. (SK-3003) = 13 ½ inches.

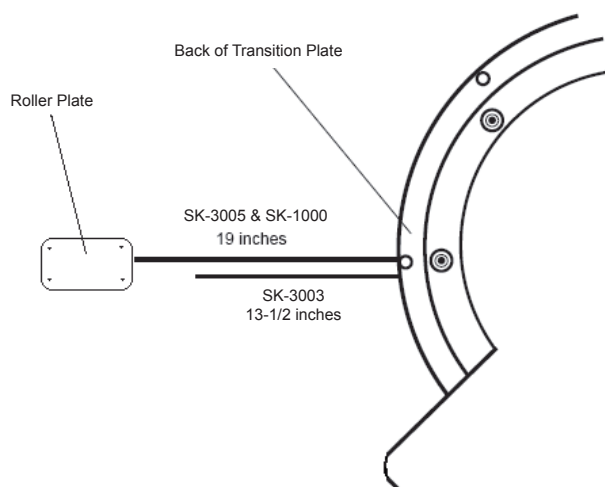

3. Place the Roller Plate on roof centered with the TRAV'LER unit.

4. Place a small bead of sealant* over each of the four screw holes in the roller plate.

5. Run a 5/16th screw through each of the holes and place.

6. Place a second small bead of sealant* over the head of each 5/16th screw.

7. Allow the sealant* to dry before lowering the TRAV'LER antenna.

*please refer to your coach manufacturer for the proper sealant for your vehicle.




Check to be sure that there is nothing above the TRAV'LER that might prevent it from raising. You will need at least 40" of clearance above the TRAV'LER Mount to ensure that you have room to raise the reflector.

WINEGARD® SKA-004 TRAV'LER® Roller Plate Installation Instructions

1. Once the TRAV'LER is installed, raise the unit to allow access to the roof. (Refer to **Raising Antenna** on back of sheet, or the TRAV'LER installation manual, for directions to raise the antenna.)

2. From the back lip of the transition plate, (see figure below.)

- a. (SK-3005) = 19 inches.
- b. (SK-1000) = 19 inches.
- c. (SK-3003) = 13 ½ inches.

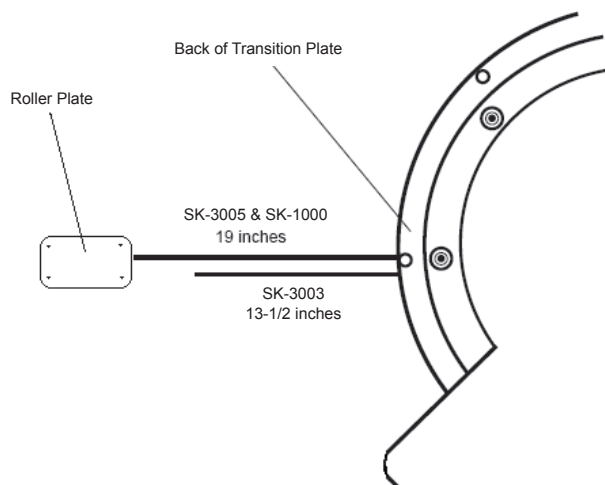

3. Place the Roller Plate on roof centered with the TRAV'LER unit.

4. Place a small bead of sealant* over each of the four screw holes in the roller plate.

5. Run a 5/16th screw through each of the holes and place.

6. Place a second small bead of sealant* over the head of each 5/16th screw.

7. Allow the sealant* to dry before lowering the TRAV'LER antenna.

*please refer to your coach manufacturer for the proper sealant for your vehicle.



Check to be sure that there is nothing above the TRAV'LER that might prevent it from raising. You will need at least 40" of clearance above the TRAV'LER Mount to ensure that you have room to raise the reflector.

RAISING ANTENNA

Steps 1-7 explain how to use the TRAV'LER Interface box to raise the mount to install the roller plate.

1. Press [POWER] and hold for 2 seconds to turn "ON" the TRAV'LER Interface Box. Wait until the Interface Box finishes "connecting to antenna".

NOTE: After "10 SECONDS" the TRAV'LER "Search Routine" starts and the unit will raise. (See NOTE)

2. Press [ENTER] and hold for 2 seconds or until the unit enters its Menu Mode.

3. Press [SELECT] to move the asterisk to [INSTALLATION].

4. Press [ENTER]. You will be asked to provide a code to enter the Installation Menu.

5. Press [ENTER] 4 times to enter code 0000.

6. Press [SELECT] to move the asterisk to [RAISE DISH].

7. Press [ENTER] the TRAV'LER mount will raise up about half way, to make it possible to attach the reflector.

NOTE: If the TRAV'LER enters the "Search Routine" you can still enter the "Menu Mode". See steps A & B.

If the TRAV'LER Mount rises past 1/2 way before [RAISE DISH] is selected (See Step 6) the TRAV'LER will hit its Upper Hard Stop and "Motor Stall" appears. This is Normal!

The "Motor Stall" means the TRAV'LER is all the way up & mount can rise no more. There are two easy ways to clear the "Motor Stall". Either is okay. (See Steps A & B).

A. Press [ENTER] the TRAV'LER will return to the "Installation Menu" or

B. Press [POWER] the TRAV'LER will stow and turn "OFF" (Restart at Step 1).



Winegard Company • 3000 Kirkwood Street • Burlington, IA 52601 • 319/754-0600 Fax 319/754-0787 • www.winegard.com
Printed in U.S.A. © 2008 Winegard Company 2452141 Rev. 2/08

RAISING ANTENNA

Steps 1-7 explain how to use the TRAV'LER Interface box to raise the mount to install the roller plate.

1. Press [POWER] and hold for 2 seconds to turn "ON" the TRAV'LER Interface Box. Wait until the Interface Box finishes "connecting to antenna".

NOTE: After "10 SECONDS" the TRAV'LER "Search Routine" starts and the unit will raise. (See NOTE)

2. Press [ENTER] and hold for 2 seconds or until the unit enters its Menu Mode.

3. Press [SELECT] to move the asterisk to [INSTALLATION].

4. Press [ENTER]. You will be asked to provide a code to enter the Installation Menu.

5. Press [ENTER] 4 times to enter code 0000.

6. Press [SELECT] to move the asterisk to [RAISE DISH].

7. Press [ENTER] the TRAV'LER mount will raise up about half way, to make it possible to attach the reflector.

NOTE: If the TRAV'LER enters the "Search Routine" you can still enter the "Menu Mode". See steps A & B.

If the TRAV'LER Mount rises past 1/2 way before [RAISE DISH] is selected (See Step 6) the TRAV'LER will hit its Upper Hard Stop and "Motor Stall" appears. This is Normal!

The "Motor Stall" means the TRAV'LER is all the way up & mount can rise no more. There are two easy ways to clear the "Motor Stall". Either is okay. (See Steps A & B).

A. Press [ENTER] the TRAV'LER will return to the "Installation Menu" or

B. Press [POWER] the TRAV'LER will stow and turn "OFF" (Restart at Step 1).



Winegard Company • 3000 Kirkwood Street • Burlington, IA 52601 • 319/754-0600 Fax 319/754-0787 • www.winegard.com
Printed in U.S.A. © 2008 Winegard Company 2452141 Rev. 2/08



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.