


SET-UP

Hitch mount (required, not included)

CONTENTS:

- 4 pole sections preassembled
- cable strap kit

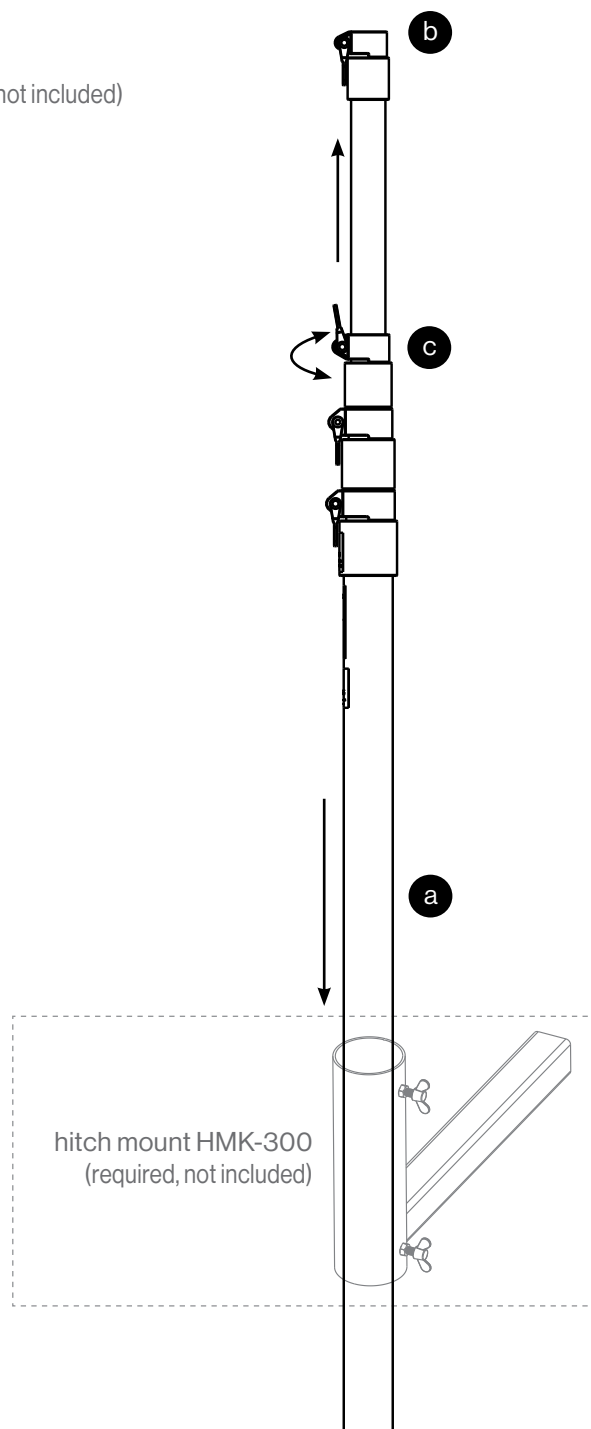

- 1 PLACE** pole through hitch mount (required, not supplied) until secure on the ground and tighten until snug. **Do not overtighten (a).**

WARNING: Failure to properly secure pole in support bracket may result in serious injury or death.

- 2 ATTACH** top mount, if required (not supplied), to antenna (not supplied), and attach to pole (b). Check for adequate clearance from power lines or other obstructions before raising unit.

WARNING: INSTALLATION OF THIS PRODUCT NEAR POWER LINES IS DANGEROUS. Watch out for overhead power lines. Check distance to power lines before installing. Stay a minimum of twice the length of the antenna plus the length of the mast from all power lines

- 3 FLIP** thumb latch up on next section of pole to the open position and extend top section. Secure cable to pole with provided cable strap. Press thumb latch down to lock (c). Do not raise past the red line on pole.

- 4 REPEAT** on middle and bottom sections as in step 3 (do not raise past the red line on each section), until desired height reached. Max height 15 ft.

WARNING: Pole must be removed prior to vehicle/camper moving. Failure to do so may cause damage or death.

Works with Winegard approved products and accessories. For complete list see Winegard website. Use with any other products will void Product Warranty.

TIPS / WARNINGS

INSTALLATION OF THIS PRODUCT NEAR POWER LINES IS DANGEROUS. Watch out for overhead power lines. Check the distance to the power lines before installing. Stay a minimum of twice the length of the antenna plus the length of the mast from all power lines.

Keep telescoping pole vertical when raising or lowering.

Do not raise pole sections above visual mark on pole to ensure pole strength and pole sections do not become separated when raising.

To ensure proper resistance on locking mechanism, push thumb tab up and turn silver screw counterclockwise to desired tightness. Pole sections need to slide up and down with some friction between pole and locking mechanism.

E6000 GLUE is recommended if locking mechanism becomes loose on pole. Readily available online or in local hardware stores.

Lower pole to under 8 ft in winds over 35 mph.

If ice is expected, lower and store pole. Locking mechanisms will become inoperable if ice builds up in latch or pipe unit and will not be able to be lowered until ice has thawed.


Have adequate help raising and lowering pole system to maintain control of the structure.

Not intended for ON/OFF road usage. Pole must be removed prior to moving vehicle/RV.

Pole compatible ONLY with Winegard approved products. For complete list see Winegard website. Use with any other products will void Product Warranty.



LOWERING THE POLE

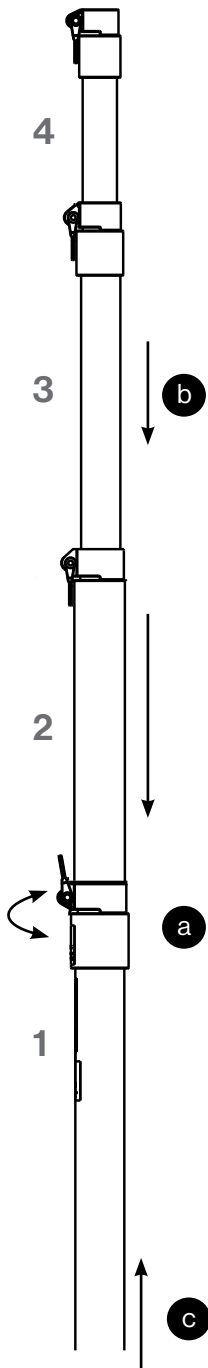

- 1 **COLLAPSE** in reverse order: Hold section 2, release section 1 thumb latch, slowly lower section 2 with both hands until collapsed. Re-engage thumb latch to lock (a).

WARNING: Do not allow the pole to free fall into lower position.

- 2 **PROCEED** to next section until all sections are collapsed (b). Remove antenna from pole.

- 3 **REMOVE** pole (c). Must be removed prior to moving vehicle/RV.

WARNING: Pole must be removed prior to vehicle/camper moving. Failure to do so may cause damage or death.

WINEGARD ONE YEAR LIMITED WARRANTY

Winegard Company provides a warranty for new Winegard Products (the "Product") against proven defects in materials or workmanship for a period of one (1) year from the date of original purchase. This warranty extends only to the initial purchaser of the Product and is non-transferrable. This warranty covers parts, but does not cover any labor or costs incurred in removal or reinstallation of the Product. Winegard will, unless otherwise required by applicable law, either repair or exchange the Product at its sole discretion. This Warranty does not cover products purchased or services used outside the contiguous 48 states and Canada, or signal related issues caused by operation out of provider's service area. This warranty does not apply if the Product becomes unable to perform its intended function as a result of changes in RF spectrum allocation, changes in broadcasting technology or service, RF interference, locations without sufficient signal strength, or other factors beyond Winegard's control.

This Limited Warranty does not apply if the product has been damaged, deteriorates, malfunctions or fails from:

- any action by Owner or other third party, including but not limited to improper installation, misuse, abuse, negligence, accident or tampering
- modification of the product as originally manufactured by Winegard in any manner whatsoever
- removing or defacing any serial number
- usage not in accordance with product instructions
- acts of nature such as damage caused by wind, lightning, ice or corrosive environments such as salt spray and acid rain.

WARRANTY COVERAGE

If a defect in material or workmanship is suspected and/or discovered, Customer must contact Winegard Support to obtain a Return Material Authorization ("RMA") at 800-288-8094 or email help@winegard.com. Winegard Support may make reasonable efforts to troubleshoot the product over the phone or email to resolve Customer's issue and Customer shall provide reasonable assistance with such troubleshooting. If troubleshooting is exhausted and the issue persists, Winegard will, at its sole discretion, repair or replace the product. Customer must provide Winegard with a proof of purchase with a dated sales receipt for the Winegard product to verify the product is under warranty.

If Winegard does not require return of the replaced Winegard Product or part, Winegard will ship Customer free of charge a replacement Winegard Product or part accompanied by instructions on installation, if applicable.

RETURN AUTHORIZATION POLICY

RMA is required prior to returning any product to Winegard Company or Winegard Warranty Services under this warranty policy. Please call Winegard Support at 800-288-8094 or send an e-mail to help@winegard.com to obtain an RMA number. Please furnish the date of purchase when requesting an RMA number. Enclose the product in a prepaid package and write the RMA number in large, clear letters on the outside of the package. To avoid confusion or misunderstanding, a shipment(s) without an RMA number(s) or an unauthorized return(s) will be refused and returned to Customer freight collect.

WINEGARD COMPANY DOES NOT ASSUME ANY LIABILITIES FOR ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, MADE BY ANY OTHER PERSON. ALL OTHER WARRANTIES WHETHER EXPRESS, IMPLIED OR STATUTORY INCLUDING WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE LIMITED TO THE ONE YEAR PERIOD OF THIS WARRANTY.

In states that do not allow limitations on implied warranties, or the exclusion of limitation of incidental or consequential damages, the above limitations or exclusions may not apply. Some states do not allow limitations on how long an implied warranty lasts, or the exclusion of limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This warranty gives Customer specific legal rights. Customer may also have other rights that may vary from state to state.

REV7-22

For help, send an email to help@winegard.com or call 1-800-788-4417



For more product details, visit Winegard's website.



WINEGARD®



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.