



FURRION

SOUNDBAR SPEAKERS

FSBT43S-BL

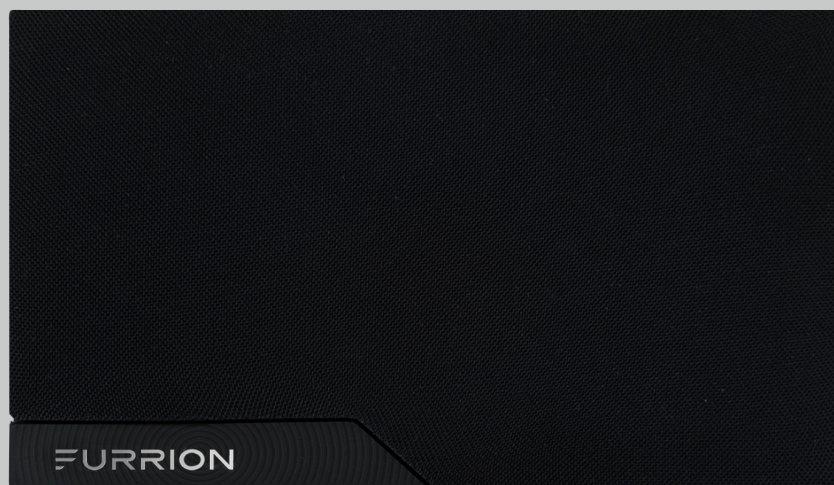

HIGH DEFINITION AUDIO



VIBRATIONSMART™




CLIMATESMART™

- Fiberglass reinforced cone extends frequency response and minimizes distortion; this controls rigidity and internal damping, and delivers high definition audio with a pure, distinct sound.
- Flush mounted design into cabinetry.



FSBT43S-BL | SOUNDBAR SPEAKERS

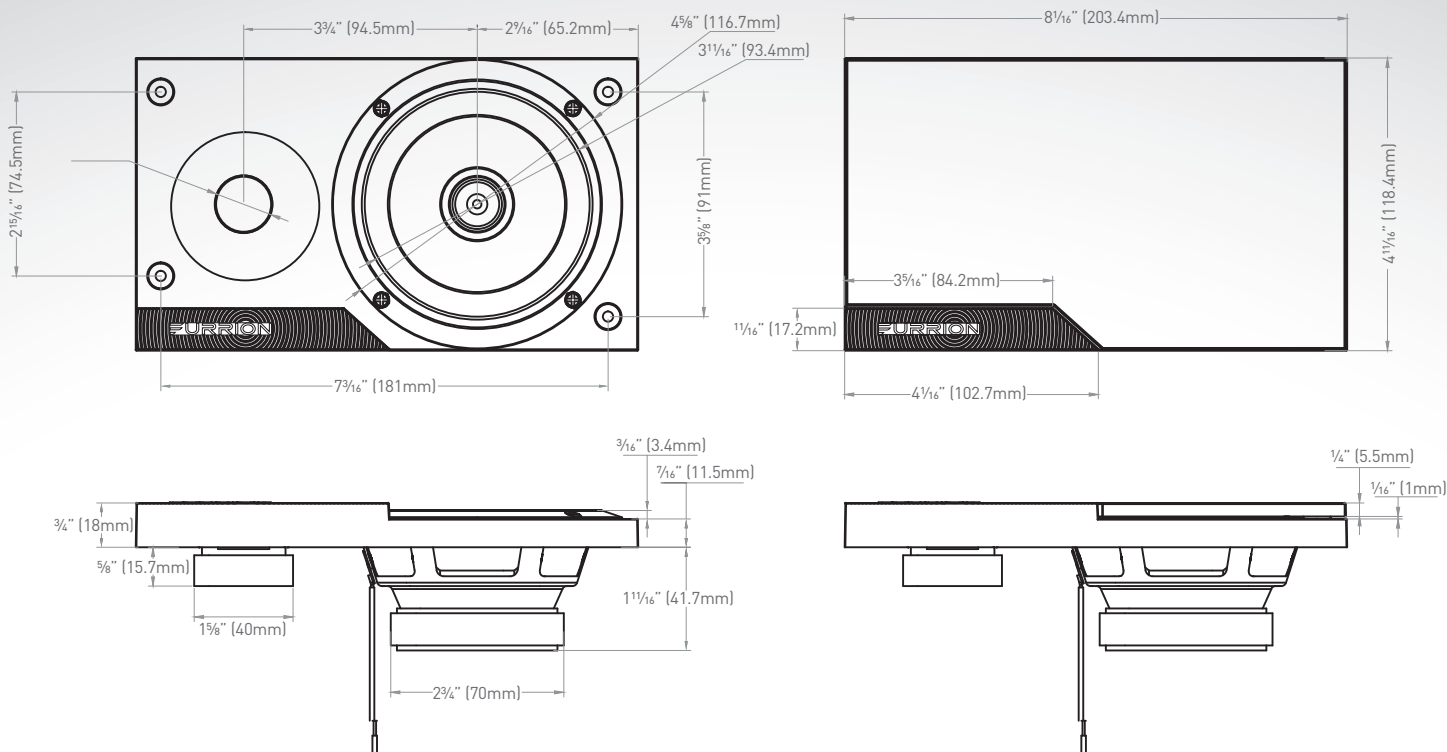

Specifications

Voice Coil Electro Impedance	4Ω@1kHz 1V
Resonance Frequency	80±20% Hz
Output Sound Pressure Level	88dB
Characteristic Sensitivity	±3dB
Effective Frequency Band	Fo~20kHz
Harmonic Distortion	5% < 1W
	≥ 85~10kHz
Power Usage	Left "+", Right" -"
Max Power	30W
Outputs on Product	25W
Product Compatibility	Furion stereo products

Packaging Information

Packaging Type	Brown Box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (L x H x W)	9 3/4" x 7 1/2" x 5 7/8" (247 x 190 x 149mm)
Individual Packaging Gross Weight (kg/lbs)	2.3/5.1
Individual Packaging Net Weight (kg/lbs)	1.6/3.5

Master Carton

Packaging Type	Master Carton Box
Quantity Per Box (pcs)	8
Master Carton Dimensions (L x H x W)	19 15/16" x 12 1/4" x 15 1/16" (506 x 310 x 395mm)
Master Carton Gross Weight (kg/lbs)	18.5/40.8
Master Carton Net Weight (kg/lbs)	12.8/28.2



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.