


FURRION®

30 AMP AUTOMATIC TRANSFER SWITCH

F30-ATS



VIBRATIONSMART




CLIMATESMART

- Easy install instructions on lib
- Designed for mobile applications
- External and internal easy mount holes
- Solid brass terminals used to increase conductivity and reduce heat

- Safety mechanical interlock between contactors
- UL94 Flame retarded enclosure
- Certified to UL Standards UL1008
- Safety mechanical interlock between contactors
- Nickel plated terminals (for corrosion resistance)



F30-ATS | 30 AMP AUTOMATIC TRANSFER SWITCH

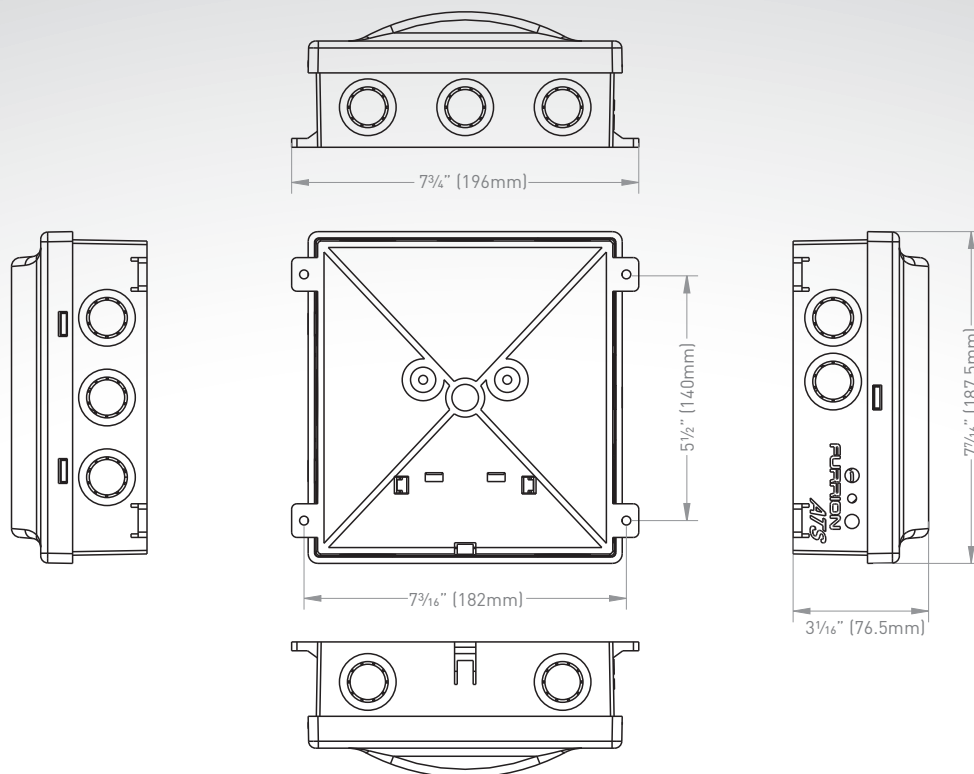

Specifications

Rated Amps	30Amp
Rated Voltage	120VAC
Rated Frequency	60Hz
Max Watts	3750W
Number of Poles	1 pole
Short Circuit Rating	5000A
Switch Type	Relay
Casing Material	UL 94 Fireproof Plastic

Features

Type of Terminals	Screw
Grounding Terminal	✓
Low Arch Silver Terminals	✓
30sec Gen Time Delay	✓
Timer By Pass Switch	✓
Mechanical Interlock	✓
Number of Cable Entry Positions	10
Minimum Cable Size	10AWG x 3
Certification	UL1008

Packaging Information

Packaging Type	Master carton box
Quantity Per Box (pcs)	1
Individual Packaging Dimensions (L x H x W)	10 7/16" x 5 3/4" x 10 1/16" (265 x 145 x 255mm)
Individual Packaging Gross Weight (kg/lbs)	1.2/2.7
Individual Packaging Net Weight (kg/lbs)	0.8/1.8

Master Carton

Packaging Type	Master Carton Box
Quantity Per Box (pcs)	4
Master Carton Dimensions (L x H x W)	20 7/8" x 11 1/16" x 12 5/8" (530 x 280 x 320mm)
Master Carton Gross Weight (kg/lbs)	5.5/12.1
Master Carton Net Weight (kg/lbs)	3.2/7.1



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.