

Description

The 30 Amp cordset range comes with an optional Powersmart LED indicator system on both plug and connector. These LEDs indicate when power is present. Furrion Cordsets are made to the highest quality standards for long life and backed by Furrion’s 5 year warranty.

Features

- Powersmart system comes with a LED on both plug and connector
- Plugs and connectors designed with side grips for easy, user friendly connection
- Available in standard yellow or titanium
- Weatherproof storage bag included with every 30 Amp 12ft cordset
- Universal fit with all other brands

Specifications

- 30A rated up to 600V, 105° C
- 30A 10/3 STW
- 15A rated up to 300V, 105° C
- 15A 14/3 SJTW
- NEMA L5-30 (30 Amp)
- NEMA 5-15 (15 Amp)
- UL and CUL certification



Bright Blue LED Power Voltage Indicator

Product Coding and Pin Configurations:

15 Amp 125V extension cordset

Conn. (F) Plug (M)



50ft FP15EX-SY (Yellow)



30 Amp Powersmart 125V cordset with Powersmart LED



12ft F30C12-SY (Yellow) / F30C12-SS (Titanium)
25ft F30P25-SY (Yellow) / F30P25-SS (Titanium)
50ft F30P50-SY (Yellow) / F30P50-SS (Titanium)



POWERSMART
POWER VOLTAGE INDICATOR




30 Amp 125V cordset



25ft F30C25-SY (Yellow) / F30C25-SS (Titanium)
50ft F30C50-SY (Yellow) / F30C50-SS (Titanium)



Bright Blue LED Power Voltage Indicator

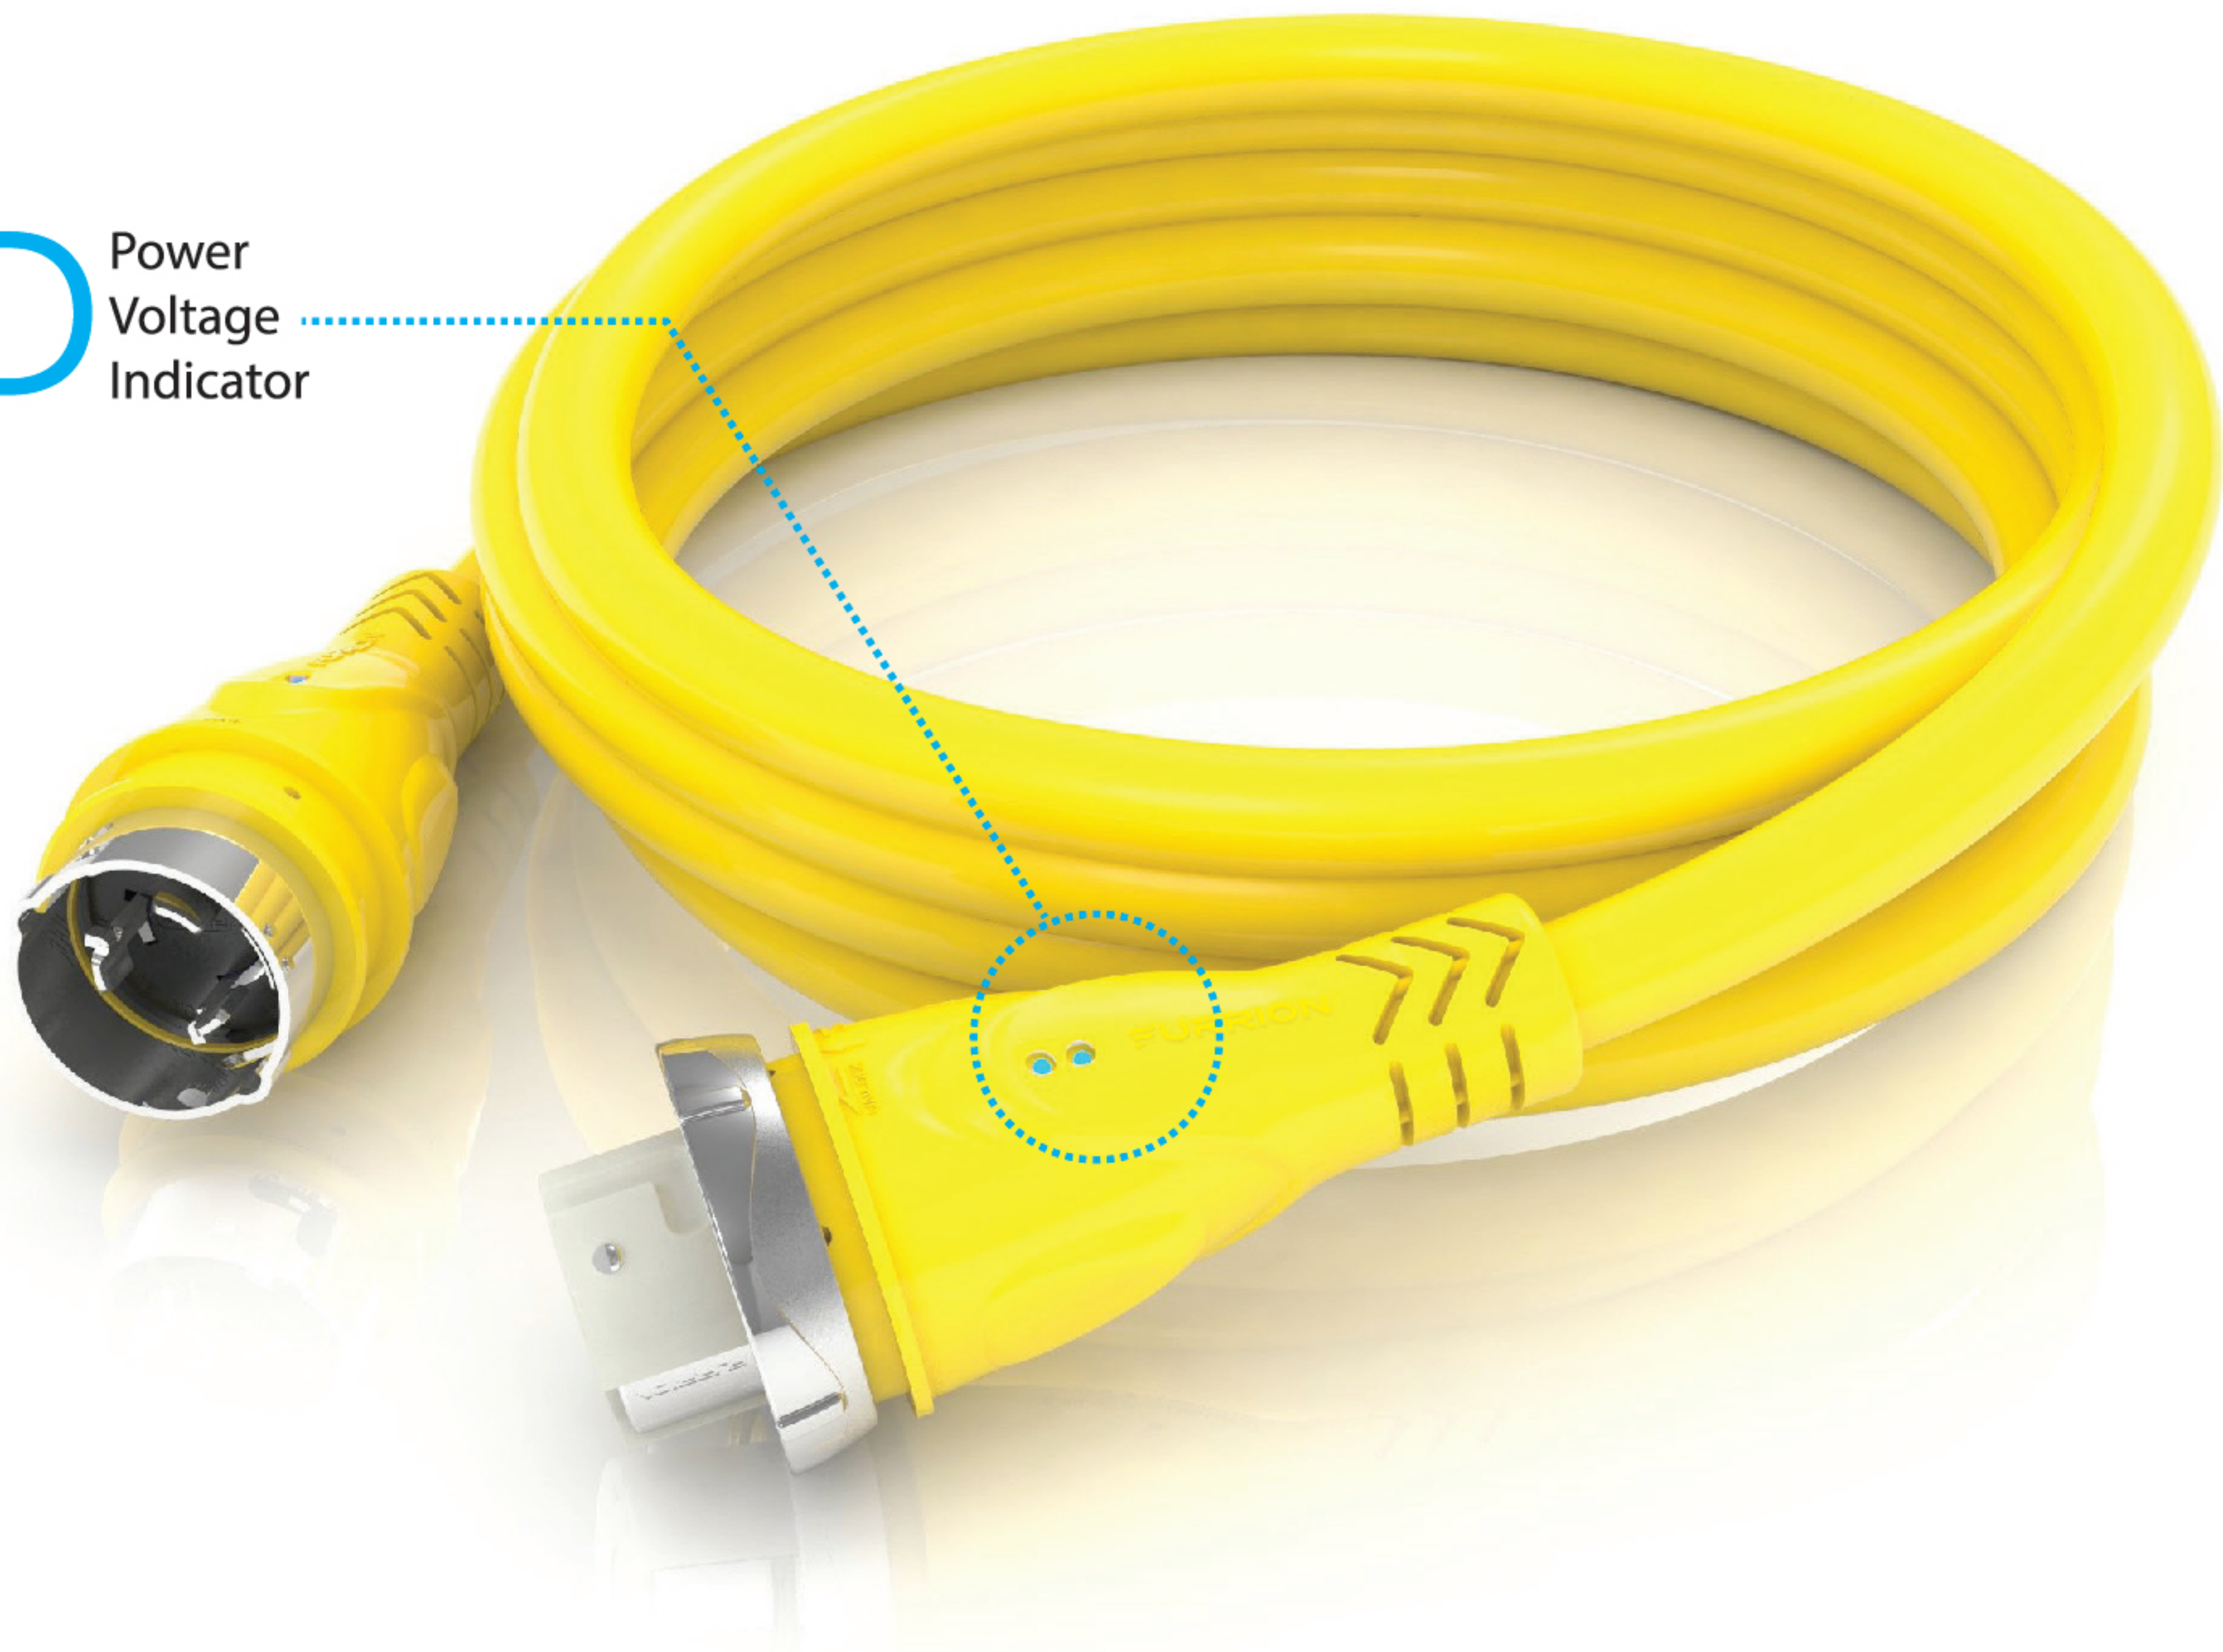

Description:

The 50 Amp marine cordsets come standard with Powersmart blue LED indicators to indicate when power is present. The new 125V marine cordset also has the added feature of a reverse polarity and neutral loss indicator for immediate alert of a potential problem from the power supply. The 125/250V cordsets include two LED indicators to provide indication of each live leg of the power supply. Marine cordsets are designed and specifically made to withstand the harsh marine environment and outdoor applications to provide long life.

Features:

- Powersmart bright blue LED voltage indicators (125/250V cordsets)
- Faultsmart reverse polarity and neutral loss indicator (125V cordsets)
- Plugs and connectors designed with side grips for easy, user friendly connection
- Universal fit with all other brands
- Manufactured using marine-grade materials

Specifications:


- Cable specs: rated up to 600V, 105° C
- 50A 125V: 6/3 STOW
- 50A 125/250V: 6/4 STOW
- NEMA SS-1 (50 Amp 125V)
- NEMA SS-2 (50 Amp 125/250V)



Product Coding and Pin Configurations:


50 Amp Faultsmart 125V cordset

Conn. (F)	Plug (M)		
		25ft	F50125-SY (Yellow)
		50ft	F50150-SY (Yellow)

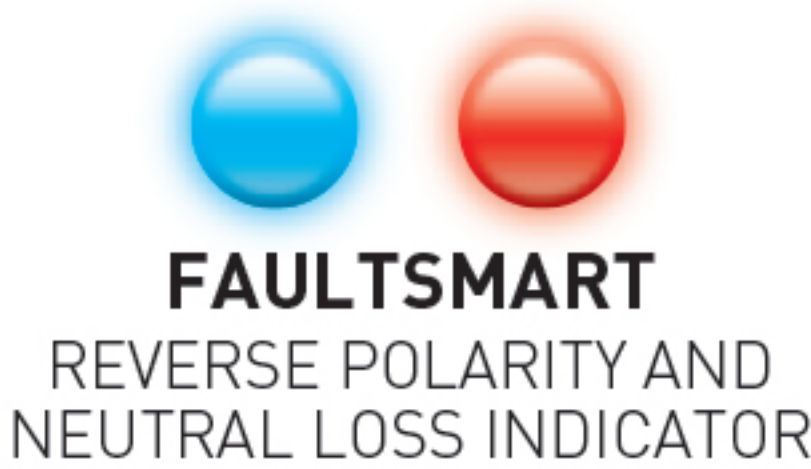

50 Amp Powersmart 125/250V cordset

Conn. (F)	Plug (M)		
		25ft	F50225-SY (Yellow)
		50ft	F50250-SY (Yellow)

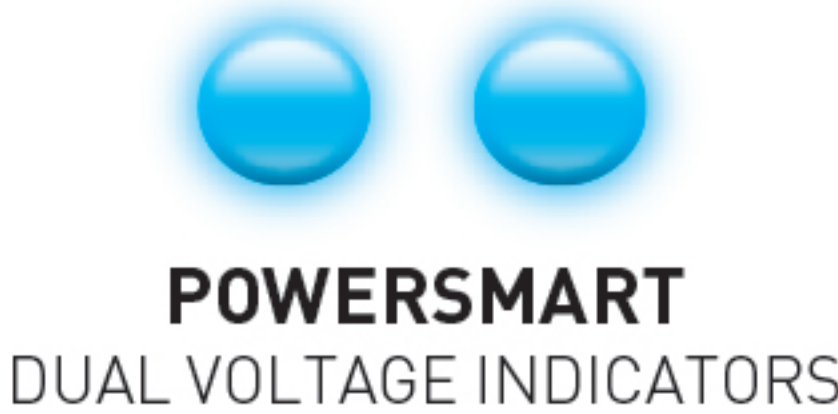



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.