

610-0100 Ignition Switch



TriMark's ignition switches satisfy the toughest customers in the roughest environments with superior performance and reliability. Further enhancement is now available by offering a heavy duty ignition switch for on or off-highway applications with KeyOne™ Plus modular locking system providing "One Key — One Vehicle" convenience.

FEATURES/BENEFITS:

- Contact rating: 50 Amp at 12 VDC continuous (battery)
 - ◊ Ignition - 20 Amps
 - ◊ Accessory - 30 Amps (inductive)
 - ◊ Start - .33 Amps
- Standard positions: Accessory, Off, On (ignition/accessory) and Start
- Rugged and durable construction is environmentally sealed for long life
- Standard brass Packard Electronic Connectors (#56)

Global Locations:

TriMark Corporation
500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com

TriMark Europe
Cedar Court
Walker road
Bardon Hill
Coalville LE67 1TU
United Kingdom
Tel: +44(0)1530 512460
Fax: +44(0)1530 512461
www.trimarkeu.com

TriMark (Xuzhou)
Building A5 Jingwu Road
Xuzhou Economic
Development Zone
Xuzhou, Jiangsu
221004 PR China
Tel: +86 516 8773 0018
Fax: +86 516 8773 0058
www.trimarkcn.com



TriMark. Interactive. Product. Selector



TriMark



TriMark Corporation

AVAILABLE:

- KeyOne™ Plus for a single-key system, keyed alike or keyed random
- In a wide variety of codes which allows the customer flexibility in keying a unit alike or differently
- Custom terminal configurations (please inquire)
- Custom function and positions (please inquire)



FINISH:

- Retaining nut: Black or bright chrome
- Housing: Satin nickel

For more information visit
www.trimarkcorp.com


MATERIAL:

- Sturdy zinc die cast alloy housing and retaining nut
- Base: Engineered plastic
- Terminals and contacts: Tin plated brass

INSTALLATION:

- Standard 1.00" mounting hole
- Recommended panel thickness; .115"-.225" (2.9-5.7mm)
- Knurled retaining nut is included. Recommended torque in 10 ft-lbs. (13.3 N-m)

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

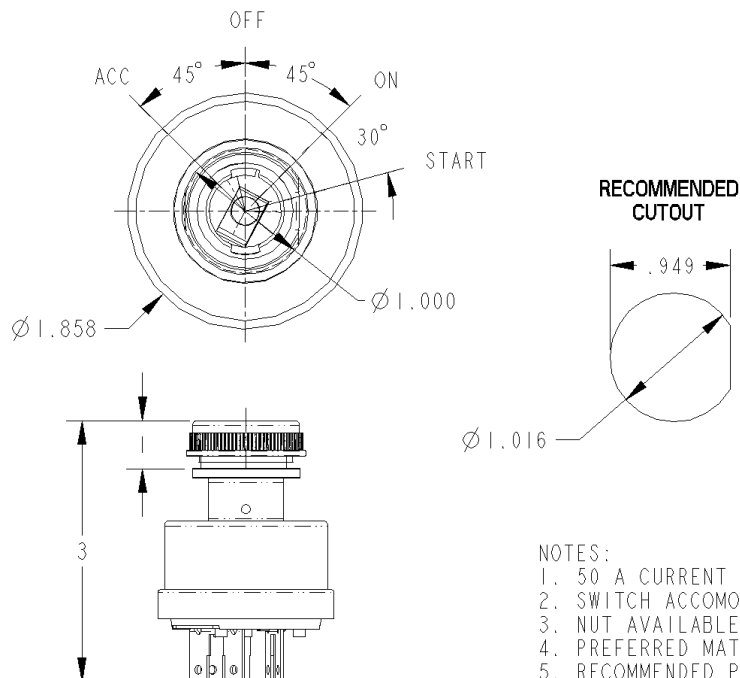



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.