


RV Series GS Inverter/Chargers

xantrex[™]

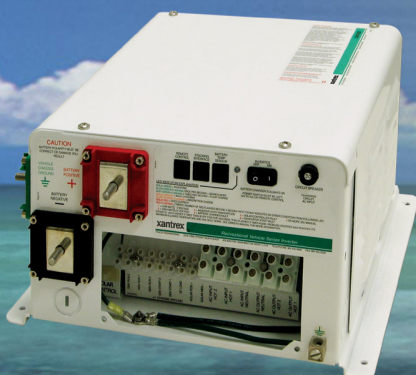

Feature-rich modified sine wave inverter/chargers

Reliable AC Power for Recreational Vehicles

Feature-rich and easy to install, the RV Series GS produces up to 3000 watts of continuous, modified sine wave power from a 12-volt battery bank. It is ideal for powering basic appliances and power tools. Designed for use with electricity supplied from your generator or RV campground hookup, these inverter/chargers provide automatic, multistage charging, manual battery equalization and temperature sensitive charging for optimal care of your batteries. A built-in transfer switch automatically transfers between inverter power and incoming AC power.

All RV Series products have a built-in shunt, which when paired with RC/GS Remote Panel enables advanced battery monitoring and inverter/charger control. They also have the necessary built-in hardware to be connected to your generator, enabling automatic generator starting when paired with RC/GS remote panel.

Product Features

- ▶ 2000/2500/3000 watt inverter
- ▶ 100/120/140A three-stage battery charger recharges batteries quickly and accurately
- ▶ Can be installed to transfer 30 amp or 50 amp service
- ▶ Power sharing prevents source AC input circuit breaker from tripping
- ▶ Built-in shunt enables battery fuel gauge display
- ▶ Built-in automatic starting system for generators with thermostat control
- ▶ 24 month warranty

Options

- ▶ Models with dual branch-rated circuit breakers (2x20A, or 1x20A and 1x15A)

Accessories

- ▶ Compatible with RC/GS remotes
- ▶ Battery Temperature Sensor available in 15, 25 and 35 foot lengths



Xantrex Technology Inc.

Headquarters
8999 Nelson Way
Burnaby, British Columbia
Canada V5A 4B5
800 670 0707 Toll Free
604 420 1591 Fax

541 Roske Drive, Suite A
Elkhart, Indiana
USA 46516
800 446 6180 Toll Free
574 294 5989 Fax

www.xantrex.com

RV Series GS Inverter/Chargers

Electrical Specifications – Inverter

Models	RV2012GS	RV2512GS	RV3012GS
Output power AC (max. continuous)	2000 watts	2500 watts	3000 watts
Surge rating (AC amps)	44 A	48 A	52 A
Output frequency	60 Hz +/- 0.4%	60 Hz +/- 0.4%	60 Hz +/- 0.4%
Output waveform	Modified sine wave	Modified sine wave	Modified sine wave
Peak efficiency	94%	94%	94%
AC output connections	Dual	Dual	Dual
AC input connections	Dual	Dual	Dual
AC transfer switch	50 A	50 A	50 A

Electrical Specifications – Charger

AC input voltage	120 VAC	120 VAC	120 VAC
DC input voltage range	10.2 - 15.5 VDC	10.2 - 15.5 VDC	10.2 - 15.5 VDC
Battery voltage (nominal)	12 VDC	12 VDC	12 VDC
Max charge output DC amps	100 A	120 A	140 A
Charge Control	3-Stage	3-Stage	3-Stage
Battery type settings	Wet/Gel/AGM	Wet/Gel/AGM	Wet/Gel/AGM
Equalization	Yes	Yes	Yes
Temperature sensitive charging	Yes	Yes	Yes

General Specifications

Operating temperature range	32°F-104°F (0°C-40°C)	32°F-104°F (0°C-40°C)	32°F-104°F (0°C-40°C)
Remote Panel	RC/GS	RC/GS	RC/GS
Optional battery temperature sensor	15, 25 and 35 foot lengths	15, 25 and 35 foot lengths	15, 25 and 35 foot lengths
Recommended Class T DC Fuse	250 A	300 A	400A
Dimensions (H x W x L)	7.25x13.12x13.9" (180x333x352mm)	7.25x13.12x13.9" (180x333x352mm)	7.25x13.12x13.9" (180x333x352mm)
Weight	45 lb (20.5 kg)	50 lb (22.7 kg)	60 lb (27.2 kg)
Warranty	24 months	24 months	24 months
Part numbers	RV2012GS RV2012-B15/20 (20/15 circuit breakers) RV2012-B20/20 (20/20 circuit breakers)	RV2512GS	RV3012GS
Accessories (all models)	RC/GS (on/off control and setup, state of charge, LCD, AGS) 809-0946 35' Battery Temperature Sensor		

Regulatory Approvals

UL and CUL listed to UL 458

Note: Specifications subject to change without notice. Other cable lengths and accessories are available on request.



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.