


Note: The red X indicates to remove the white wire from the run capacitor and connect the BROWN wire from EasyStart only to the white wire. Connect the EasyStart white wire to the empty terminal created when the white wire was removed.

Connect the EasyStart orange wire to the red wire side of the run capacitor alongside the red wire. Do not remove the red wire.

Splice the black wire into the compressor black wire in a convenient location near the relay.



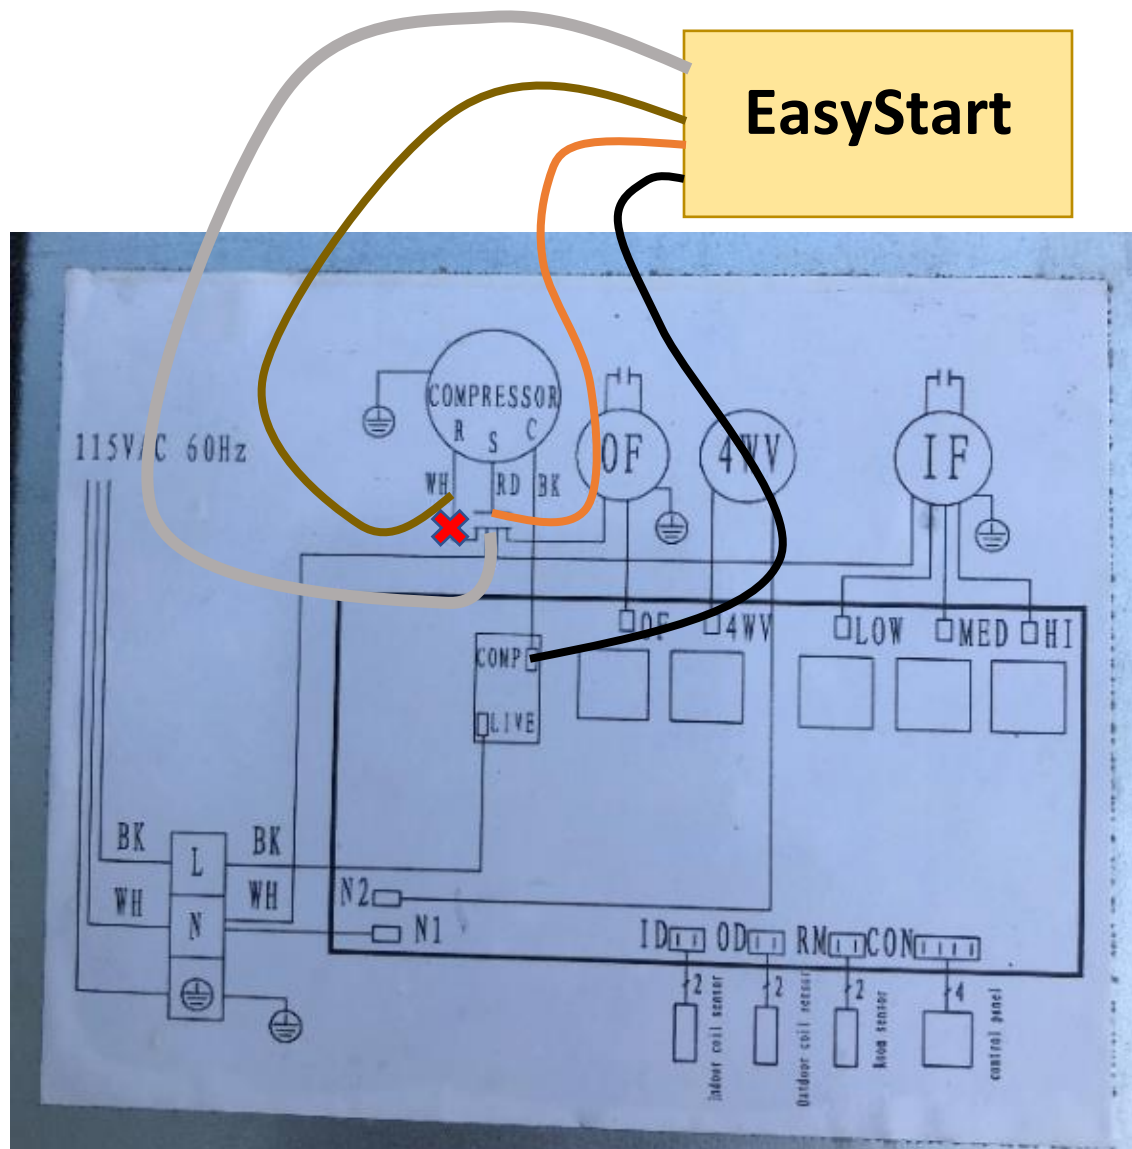

This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.