


144GPH / 2.4GPM

Tankless Gas Water Heater

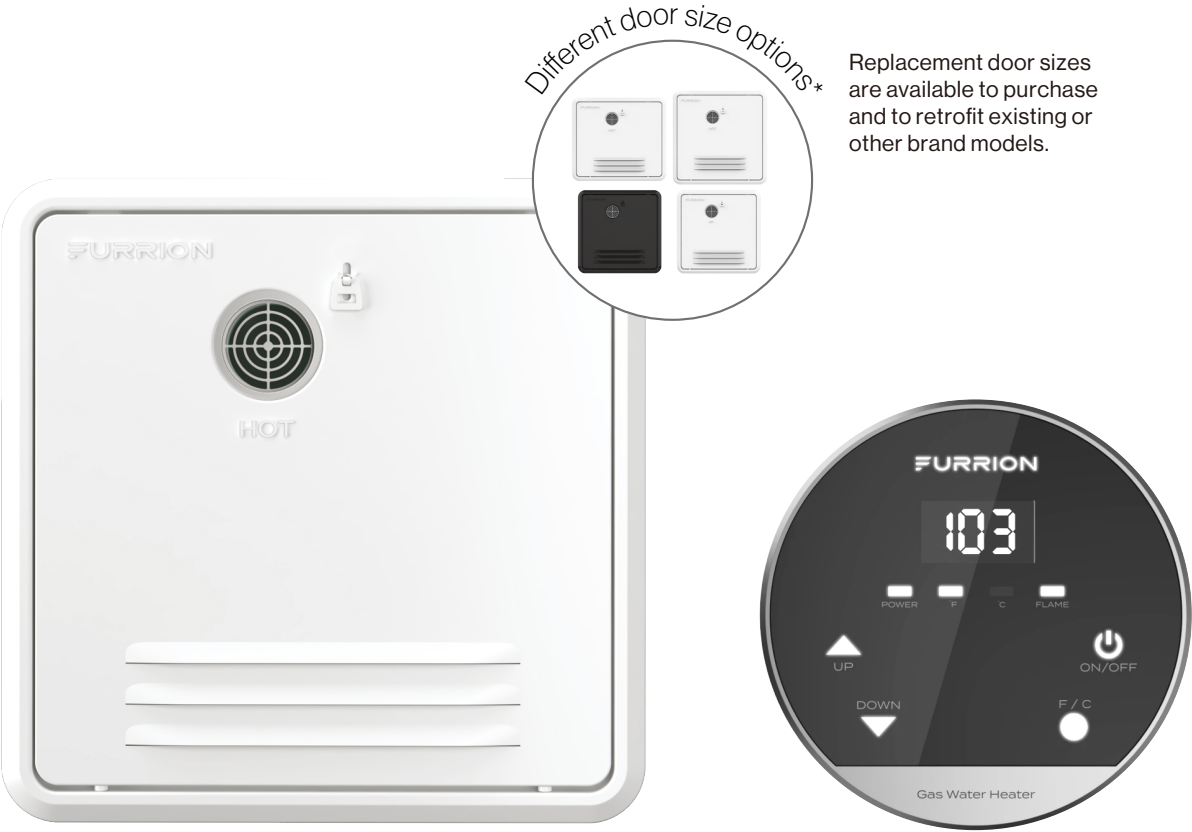

Different door size options*

Replacement door sizes are available to purchase and to retrofit existing or other brand models.


Tankless Gas Water Heater with Door

Wall Thermostat


Main Features

- HOT WATER CAPACITY
- CONSISTENT TEMPERATURE
- ELECTRONIC IGNITION
- OVER TEMP. PROTECTION
- AUTO TURN OFF
- BLOWER BLOCK PROTECTION
- THERMOSTAT
- LOW PRESSURE ALARM
- PRESSURE RELIEF VALVE


Main Unit

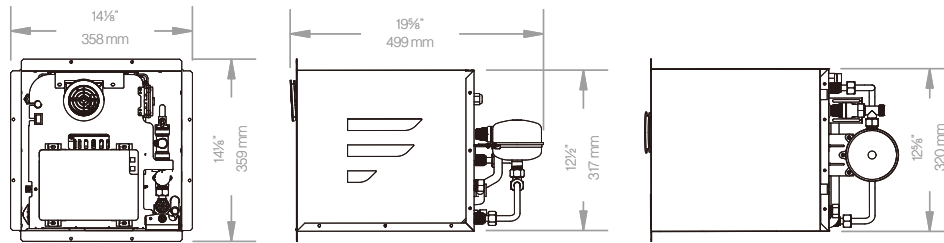

Thermostat



Door (Sold Separately)

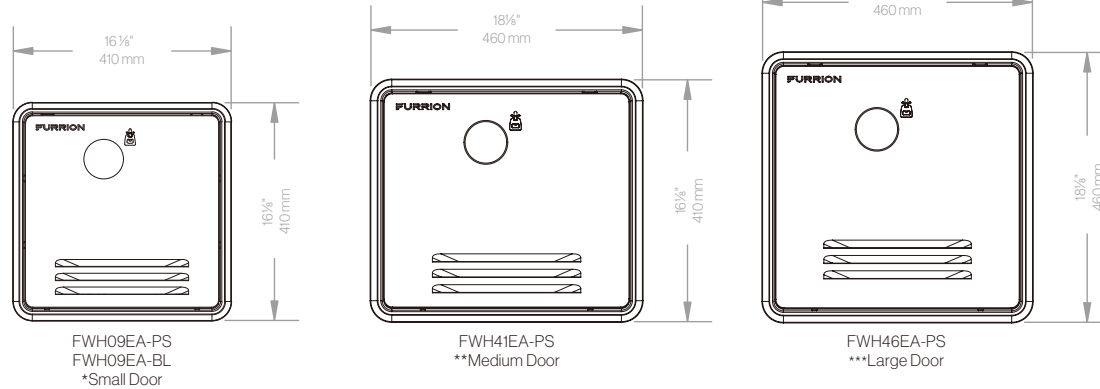

Specifications

Temperature Setting Range	95 - 124°F (35 - 51°C)
Default Setting Temperature	115°F (46°C)
Temperature Stability	Temperature Stabilizer Technology ±1.8-2.6°F (1-2°C)
Low Water Flow Protection	Auto Cut-off <0.32GAL (1.2L)/min
Over Current Protection	10amp Fuse
High Water Pressure Protection	≥87psi (6bar) Auto Release Pressure Valve
Over Temperature Protection	Software Protection: 136°F, ±1.8°F (76°C, ±1°C) Thermal Sensor: 135°F, ±14.4°F (75°C, ±8°C)
Input BTU	13,000 ~ 60,000BTU

Specifications

Gas Supply	LP (Propane) Only
Gas Inlet Pressure	11" - 14" inch WC
Electric Power Supply	DC 12V 3A
Working Pressure (Water Inlet)	10 - 65 PSI (0.68 - 4.5bar)
Water Flow	0.32GAL (1.2L)/min – 2.4 GAL (9L)/min
Thermal Efficiency	≥81%
Gas Line Connector	UNF 5/8" – 18
Water Inlet Connector	1/2" NPT
Water Outlet Connector	1/2" NPT
Operating Noise	≤65dB
Automatic Ignition	✓
Exhaust Blocking Protection	✓

Dimensions & Weight	Main Unit	*Small Door	**Medium Door	***Large Door
Product Dimension (W x H x D)	12 3/4 x 12 x 20 3/4" 324 x 320 x 527mm	16 1/8 x 16 1/8 x 1 1/4" 410 x 410 x 33mm	18 1/8 x 16 1/8 x 1 1/4" 460 x 410 x 33mm	18 1/8 x 18 1/8 x 1 1/4" 460 x 460 x 33mm
Packaging Dimension (W x H x D)	22 3/4 x 16 x 16 1/8" 577 x 407 x 410mm	18 1/4 x 19 5/8 x 3 1/8" 465 x 498 x 78mm	20 1/4 x 19 5/8 x 3 1/8" 515 x 498 x 78mm	20 1/4 x 21 5/8 x 3 1/8" 515 x 548 x 78mm
Net Weight (lbs/kg)	27.6lbs / 12.5kg	3.7lbs / 1.7kg	4.6lbs / 2.1kg	5.3lbs / 2.4kg
Gross Weight (lbs/kg)	36.3lbs / 16.5kg	5.5lbs / 2.5kg	6.4lbs / 2.9kg	7.1lbs / 3.2kg

* Retrofit door for Suburban™ 4/6 gallon water heater model.

** Retrofit door for Atwood™ 6 gallon water heater model.

*** Retrofit door for Suburban™ and Atwood™ 10 gallon water heater model.

FWH09A-AM V3.0

Customer Service & Technical Support: Email: support@furrion.com Tel: (888) 354 5792 www.furrion.com

Furrion® and the Furrion logo are trademarks licensed for use by Furrion Ltd. and registered in the U.S. and other countries. © 2007-2022 Furrion Ltd.





This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.