


Bus/Limo Fan Speed Module

Intellitec's Fan Speed Module is the ideal answer to the problem of controlling the fan speed in limousines and small buses. This module provides three, individually fused outputs to feed the air conditioning/heating fan. It is controlled from a remote switch panel with two small gauge wires. The switch can be either a four position such as a rotary, or four momentary switches. With the four position, the speed is selected by putting the switch in the desired position. When using momentary switches, briefly pressing any of the four momentary switches will change the speed to that setting. When momentary switches are used, any number of switch panels can easily be used to control to fan from more than one location. If less than three speeds are needed, the number of positions on the switch can be reduced to the desired number.

The module is equipped with an output that can be connected to the Switch input of another Fan Speed Module in applications where more than one fan is being used. With this connection, all the fans in the system will operate at the same speed from the single switch input.

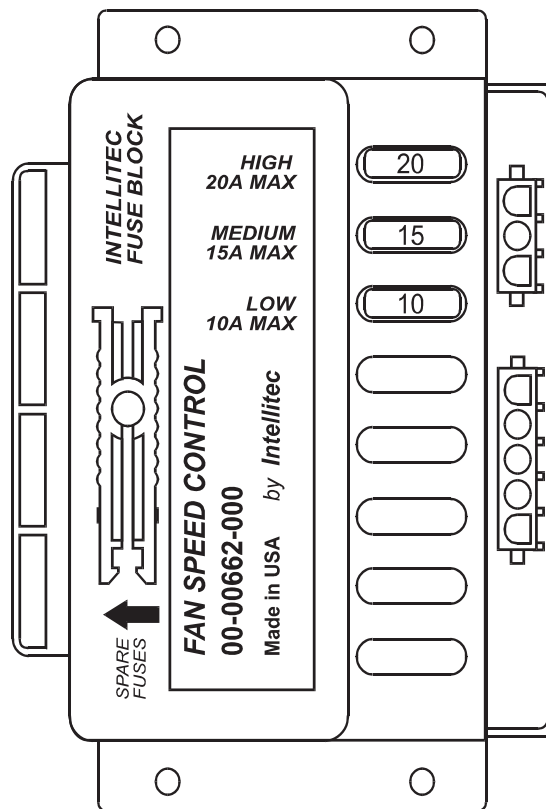

Part Number 00-00662-000

Bus/Limo Fan Speed Module

How It Works:


The **Fan Speed Module** controls the speed of the HVAC fan through three relays with individually fused outputs. The module senses the voltage at the Switch input. As different values of resistors are connected to this line from ground, the speed of the fan is changed. The speed is "latched" in the module so that the Switch line can be "opened" and the fan will continue to operate the set speed. This allows the module to be used with either a multi-position switch, such as a rotary, or using momentary switches, any number of panels at different locations can be used.

Grounding the switch line will stop the fan.

Specifications:

	<u>12 Volt</u>	<u>24 Volt</u>
Part Number	00-00662-000	00-00662-240
Maximum Continuous Carry Current	25 Amps Max.	25 Amps Max.
Maximum Ambient Temperature	185 Degrees F.	185 Degrees F.
Minimum Ambient Temperature	-40 Degrees F.	-40 Degrees F.

Schematic:

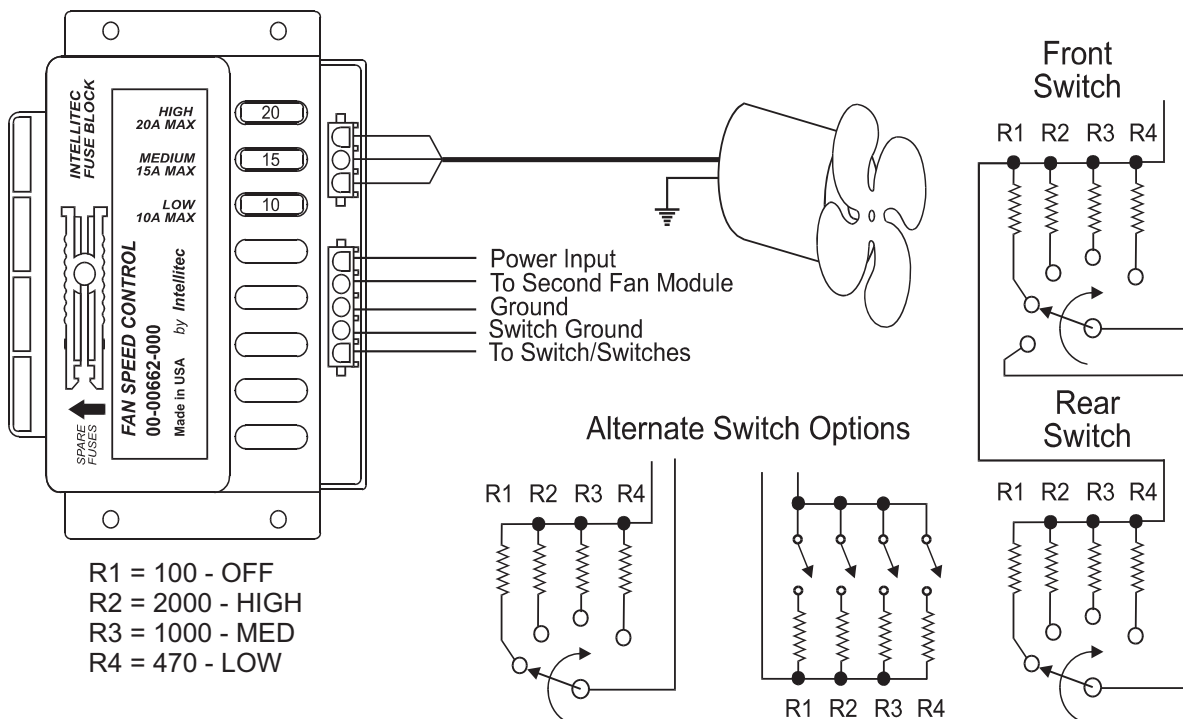

 **Intellitec**
1485 Jacobs Rd.
Deland, FL 32724
386.738.7307

P/N 53-00662-000 Rev. B 040519



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.