



LEVELING AND STABILIZATION

Purpose

This document provides instructions on how to install the Adjustable Inner Footpad on round leg tongue jacks only.

NOTE: These instructions do not apply to square leg jacks.

Introduction

The Adjustable Inner Footpad is designed to give additional stroke length to the power tongue jack or manual tongue jack.

Safety

WARNING

The “WARNING” symbol above is a sign that an installation procedure has a safety risk involved and may cause death, serious personal injury or severe product or property damage if not performed safely and within the parameters set forth in this manual. Always wear appropriate personal protection equipment for the nature of the installation procedure.

CAUTION

Moving parts can pinch, crush, or cut. Keep clear at all times.

Instructions

WARNING

The trailer **MUST** be supported per manufacturer's recommendations before working underneath. Failure to do so may result in death or serious personal injury.

WARNING

Jack footpad base plate **MUST** be in complete contact with the ground. Failure to properly level the trailer before installation may result in death, serious personal injury, severe product or property damage.



1. Make sure trailer is parked on level ground, front-to-back and side-to-side. Do not support trailer with jack footpad placed on unlevel ground.
2. Chock tires on trailer.
3. Support trailer according to manufacturer's recommendations.
4. Retract tongue jack until comfortable access to footpad is achieved.

LEVELING AND STABILIZATION

5. Remove tongue jack footpad according to manufacturer's instructions (Fig. 1).
6. Insert new adjustable footpad into inner jack leg (Fig. 2) by aligning groove of footpad with groove of inner jack leg. This will keep the snapper pin hole of the inner jack leg aligned with the footpad adjustment holes.

NOTE: If there is no groove on the inner jack leg, align its snapper pin hole with the footpad adjustment holes.

7. Set desired height by securing with snapper pin through footpad holes (Fig. 3).
8. Extend tongue jack, then remove all trailer supports used during installation.
9. Make sure all chocks are removed from tires before moving trailer.

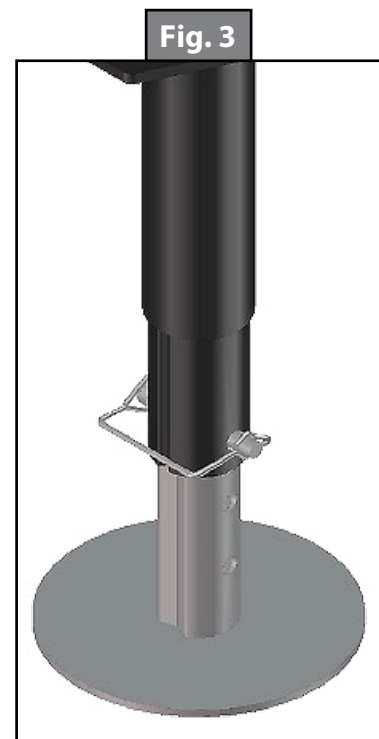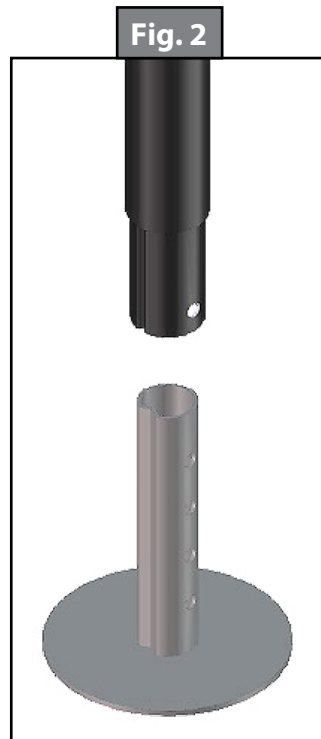



This manual is provided courtesy of **RV Tech Cheat Sheet**



Professional resources for the whole RV industry — free.

We put manuals, wiring diagrams and hard-won tech knowledge in every technician's hands, so repairs get done right the first time, techs work faster, and RV owners everywhere get better service.



rvtechcheatsheet.com/manuals

Find thousands more RV manuals, wiring diagrams and parts lists

RV techs: share fixes, ask questions and learn from each other.

Join our free Facebook group →



Follow proper safety practices. If in doubt, consult a professional RV technician.